SLUGGING WRENCH

KI TOOLS®



KI TOOLS SLUGGING WRENCH 12 PT METRIC - MM

FEATURES :

- *Made from CRV chromium vanadium alloy steel with machined drive face to ensure good contract with fastener.*
- *Flat striking face for more efficient force transfer to fastener.*
- *Manufactured to DIN 7444 Standard.*

AVAILABLE MODELS

- *KI-SW 022 – 22mm*
- *KI-SW 024 – 24mm*
- *KI-SW 026 – 26mm*
- *KI-SW 027 – 27mm*
- *KI-SW 028 – 28mm*
- *KI-SW 029 – 29mm*
- *KI-SW 030 – 30mm*
- *KI-SW 031 – 31mm*
- *KI-SW 032 – 32mm*
- *KI-SW 033 – 33mm*
- *KI-SW 034 – 34mm*
- *KI-SW 035 – 35mm*
- *KI-SW 036 – 36mm*
- *KI-SW 037 – 37mm*
- *KI-SW 038 – 38mm*
- *KI-SW 039 – 39mm*
- *KI-SW 040 – 40mm*
- *KI-SW 041 – 41mm*
- *KI-SW 042 – 42mm*
- *KI-SW 043 – 43mm*
- *KI-SW 044 – 44mm*
- *KI-SW 045 – 45mm*
- *KI-SW 046 – 46mm*
- *KI-SW 047 – 47mm*
- *KI-SW 048 – 48mm*
- *KI-SW 049 – 49mm*
- *KI-SW 050 – 50mm*
- *KI-SW 054 – 54mm*
- *KI-SW 055 – 55mm*
- *KI-SW 058 – 58mm*
- *KI-SW 060 – 60mm*
- *KI-SW 064 – 64mm*
- *KI-SW 065 – 65mm*
- *KI-SW 070 – 70mm*
- *KI-SW 075 – 75mm*
- *KI-SW 080 – 80mm*
- *KI-SW 085 – 85mm*
- *KI-SW 090 – 90mm*
- *KI-SW 095 – 95mm*
- *KI-SW 100 – 100mm*
- *KI-SW 105 – 105mm*
- *KI-SW 110 – 110mm*
- *KI-SW 115 – 115mm*
- *KI-SW 120 – 120mm*
- *KI-SW 125 – 125mm*
- *KI-SW 130 – 130mm*
- *KI-SW 135 – 135mm*
- *KI-SW 140 – 140mm*
- *KI-SW 145 – 145mm*
- *KI-SW 150 – 150mm*
- *KI-SW 155 – 155mm*
- *KI-SW 160 – 160mm*
- *KI-SW 165 – 165mm*
- *KI-SW 170 – 170mm*
- *KI-SW 175 – 175mm*

KI TOOLS®

SLUGGING WRENCH



KI TOOLS SLUGGING WRENCH 12 PT - INCHES

FEATURES :

- *Made from CRV chromium vanadium alloy steel with machined drive face to ensure good contract with fastener.*
- *Flat striking face for more efficient force transfer to fastener.*
- *Manufactured to DIN 7444 Standard.*

AVAILABLE MODELS

- *KI-SW 1050 – 5/8" Inches*
- *KI-SW 1060 – 3/4" Inches*
- *KI-SW 1070 – 7/8" Inches*
- *KI-SW 1075 – 15/16" Inches*
- *KI-SW 1100 – 1" Inches*
- *KI-SW 1105 – 1-1/16" Inches*
- *KI-SW 1110 – 1-1/8" Inches*
- *KI-SW 1115 – 1-3/16" Inches*
- *KI-SW 1120 – 1-1/4" Inches*
- *KI-SW 1125 – 1-5/16" Inches*
- *KI-SW 1130 – 1-3/8" Inches*
- *KI-SW 1135 – 1-7/16" Inches*
- *KI-SW 1140 – 1-1/2" Inches*
- *KI-SW 1145 – 1-9/16" Inches*
- *KI-SW 1150 – 1-5/8" Inches*
- *KI-SW 1155 – 1-11/16" Inches*
- *KI-SW 1160 – 1-3/4" Inches*
- *KI-SW 1165 – 1-13/16" Inches*
- *KI-SW 1170 – 1-7/8" Inches*
- *KI-SW 1175 – 1-15/16" Inches*
- *KI-SW 1200 – 2" Inches*
- *KI-SW 1205 – 2-1/16" Inches*
- *KI-SW 1210 – 2-1/8" Inches*
- *KI-SW 1215 – 2-3/16" Inches*
- *KI-SW 1220 – 2-1/4" Inches*
- *KI-SW 1225 – 2-5/16" Inches*
- *KI-SW 1230 – 2-3/8" Inches*
- *KI-SW 1235 – 2-7/16" Inches*
- *KI-SW 1240 – 2-1/2" Inches*
- *KI-SW 1245 – 2-9/16" Inches*
- *KI-SW 1250 – 2-5/8" Inches*
- *KI-SW 1255 – 2-11/16" Inches*
- *KI-SW 1260 – 2-3/4" Inches*
- *KI-SW 1265 – 2-13/16" Inches*
- *KI-SW 1270 – 2-7/8" Inches*
- *KI-SW 1275 – 2-15/16" Inches*
- *KI-SW 1300 – 3" Inches*
- *KI-SW 1305 – 3-1/16" Inches*
- *KI-SW 1310 – 3-1/8" Inches*
- *KI-SW 1315 – 3-3/16" Inches*
- *KI-SW 1320 – 3-1/4" Inches*
- *KI-SW 1325 – 3-5/16" Inches*
- *KI-SW 1330 – 3-3/8" Inches*
- *KI-SW 1335 – 3-7/16" Inches*
- *KI-SW 1340 – 3-1/2" Inches*
- *KI-SW 1345 – 3-9/16" Inches*
- *KI-SW 1350 – 3-5/8" Inches*
- *KI-SW 1355 – 3-11/16" Inches*
- *KI-SW 1360 – 3-3/4" Inches*
- *KI-SW 1365 – 3-13/16" Inches*
- *KI-SW 1370 – 3-7/8" Inches*
- *KI-SW 1375 – 3-15/16" Inches*
- *KI-SW 1400 – 4" Inches*
- *KI-SW 1405 – 4-1/16" Inches*
- *KI-SW 1410 – 4-1/8" Inches*
- *KI-SW 1415 – 4-3/16" Inches*
- *KI-SW 1420 – 4-1/4" Inches*
- *KI-SW 1425 – 4-5/16" Inches*
- *KI-SW 1430 – 4-3/8" Inches*
- *KI-SW 1435 – 4-7/16" Inches*
- *KI-SW 1440 – 4-1/2" Inches*
- *KI-SW 1445 – 4-9/16" Inches*
- *KI-SW 1450 – 4-5/8" Inches*
- *KI-SW 1455 – 4-11/16" Inches*
- *KI-SW 1460 – 4-3/4" Inches*
- *KI-SW 1465 – 4-13/16" Inches*
- *KI-SW 1470 – 4-7/8" Inches*
- *KI-SW 1475 – 4-15/16" Inches*
- *KI-SW 1500 – 5" Inches*
- *KI-SW 1520 – 5-1/4" Inches-*
- *KI-SW 1530 – 5-3/8" Inches*
- *KI-SW 1570 – 5-7/8" Inches*

OFFSET SLUGGING WRENCH



KI TOOLS OFFSET SLUGGING WRENCH 12 PT METRIC - AMERICAN TYPE

FEATURES :

- *Large striking surface for more efficient transmiltal of force .*
- *Short handle allow more flexibility working in close quarters.*
- *Heavy duty box wall provides greater torque transmission when struck.*
- *Offset handles allows maximum clearance of any obstruction during operation*
- *Made from CRV chromium vanadium alloy steel*

AVAILABLE MODELS - mm

- *KI-OFS 027 : 27mm – Length 270mm*
- *KI-OFS 030 : 30mm – Length 280mm*
- *KI-OFS 032 : 32mm – Length 300mm*
- *KI-OFS 035 : 35mm – Length 300mm*
- *KI-OFS 036 : 36mm – Length 300mm*
- *KI-OFS 038 : 38mm – Length 300mm*
- *KI-OFS 041 : 41mm – Length 320mm*
- *KI-OFS 042 : 42mm – Length 320mm*
- *KI-OFS 046 : 46mm – Length 340mm*
- *KI-OFS 050 : 50mm – Length 350mm*
- *KI-OFS 055 : 55mm – Length 360mm*
- *KI-OFS 060 : 60mm – Length 375mm*
- *KI-OFS 065 : 65mm – Length 390mm*
- *KI-OFS 070 : 70mm – Length 400mm*
- *KI-OFS 075 : 75mm – Length 420mm*
- *KI-OFS 080 : 80mm – Length 270mm*
- *KI-OFS 085 : 85mm – Length 280mm*
- *KI-OFS 090 : 90mm – Length 290mm*
- *KI-OFS 095 : 95mm – Length 300mm*
- *KI-OFS 100 : 100mm – Length 320mm*
- *KI-OFS 105 : 105mm – Length 340mm*
- *KI-OFS 110 : 110mm – Length 350mm*
- *KI-OFS 115 : 115mm – Length 360mm*
- *KI-OFS 120 : 120mm – Length 375mm*
- *KI-OFS 125 : 125mm – Length 390mm*
- *KI-OFS 130 : 130mm – Length 400mm*
- *KI-OFS 135 : 135mm – Length 420mm*

AVAILABLE MODELS - Inches

- *KI-OFS 1105 : 1 -1/16" – Length 270mm*
- *KI-OFS 1110 : 1 -1/8" – Length 270mm*
- *KI-OFS 1115 : 1 -3/16" – Length 280mm*
- *KI-OFS 1120 : 1 -1/4" – Length 290mm*
- *KI-OFS 1125 : 1 -5/16" – Length 290mm*
- *KI-OFS 1130 : 1 -3/8" – Length 300mm*
- *KI-OFS 1135 : 1 -7/16" – Length 300mm*
- *KI-OFS 1140 : 1 -1/2" – Length 300mm*
- *KI-OFS 1145 : 1 -9/16" – Length 320mm*
- *KI-OFS 1150 : 1 -5/8" – Length 320mm*
- *KI-OFS 1155 : 1 -11/16" – Length 320mm*
- *KI-OFS 1160 : 1 -3/4" – Length 340mm*
- *KI-OFS 1165 : 1 -13/16" – Length 340mm*
- *KI-OFS 1170 : 1 -7/8" – Length 340mm*
- *KI-OFS 1175 : 1 -15/16" – Length 350mm*
- *KI-OFS 1200 : 2" - Length 350mm*
- *KI-OFS 1205 : 2 -1/16" – Length 350mm*
- *KI-OFS 1210 : 2 -1/8" – Length 360mm*
- *KI-OFS 1215 : 2 -3/16" – Length 360mm*
- *KI-OFS 1220 : 2 -1/4" – Length 360mm*
- *KI-OFS 1225 : 2 -5/16" – Length 360mm*
- *KI-OFS 1230 : 2 -3/8" – Length 375mm*
- *KI-OFS 1235 : 2 -7/16" – Length 375mm*
- *KI-OFS 1240 : 2 -1/2" – Length 390mm*
- *KI-OFS 1245 : 2 -9/16" – Length 390mm*
- *KI-OFS 1260 : 2 -3/4" – Length 420mm*

KI TOOLS®

COMBINATION WRENCH

KI TOOLS COMBINATION WRENCH METRIC - MM & INCHES

FEATURES :

- *Made from CRV chromium vanadium alloy steel*
- *High torque performance over 1.6 times*
- *Manufactured to ANSI & DIN 3113 Standard*

AVAILABLE MODELS

MM	*INCHES*
KI-CW 033 - Size 33mm	*KI-CW 1070 - Size 7/8"*
KI-CW 034 - Size 34mm	*KI-CW 1100 - Size 1"*
KI-CW 035 - Size 35mm	*KI-CW 1105 - Size 1-1/16"*
KI-CW 036 - Size 36mm	*KI-CW 1110 - Size 1-1/8"*
KI-CW 038 - Size 38mm	*KI-CW 1115 - Size 1-3/16"*
KI-CW 040 - Size 40mm	*KI-CW 1120 - Size 1-1/4"*
KI-CW 041 - Size 41mm	*KI-CW 1125 - Size 1-5/16"*
KI-CW 042 - Size 42mm	*KI-CW 1130 - Size 1-3/8"*
KI-CW 046 - Size 46mm	*KI-CW 1135 - Size 1-7/16"*
KI-CW 050 - Size 50mm	*KI-CW 1140 - Size 1-1/2"*
KI-CW 055 - Size 55mm	*KI-CW 1145 - Size 1-9/16"*
KI-CW 060 - Size 60mm	*KI-CW 1150 - Size 1-5/8"*
KI-CW 065 - Size 65mm	*KI-CW 1155 - Size 1-11/16"*
KI-CW 070 - Size 70mm	*KI-CW 1160 - Size 1-3/4"*
KI-CW 075 - Size 75mm	*KI-CW 1165 - Size 1-13/16"*
KI-CW 080 - Size 80mm	*KI-CW 1170 - Size 1-7/8"*
KI-CW 085 - Size 85mm	*KI-CW 1175 - Size 1-15/16"*
KI-CW 090 - Size 90mm	*KI-CW 1200 - Size 2"*
KI-CW 095 - Size 95mm	*KI-CW 1205 - Size 2-1/16"*
KI-CW 100 - Size 100mm	*KI-CW 1210 - Size 2-1/8"*
KI-CW 105 - Size 105mm	*KI-CW 1215 - Size 2-3/16"*
KI-CW 110 - Size 110mm	*KI-CW 1220 - Size 2-1/4"*
KI-CW 115 - Size 115mm	*KI-CW 1225 - Size 2-5/16"*
KI-CW 120 - Size 120mm	*KI-CW 1230 - Size 2-3/8"*
KI-CW 125 - Size 125mm	*KI-CW 1235 - Size 2-7/16"*
KI-CW 130 - Size 130mm	*KI-CW 1240 - Size 2-1/2"*
KI-CW 135 - Size 135mm	*KI-CW 1245 - Size 2-9/16"*
KI-CW 140 - Size 140mm	*KI-CW 1250 - Size 2-5/8"*
KI-CW 145 - Size 145mm	*KI-CW 1255 - Size 2-11/16"*
KI-CW 150 - Size 150mm	*KI-CW 1260 - Size 2-3/4"*
KI-CW 155 - Size 155mm	*KI-CW 1265 - Size 2-13/16"*
	KI-CW 1270 - Size 2-7/8"
	KI-CW 1275 - Size 2-15/16"
	KI-CW 1300 - Size 3"
	KI-CW 1310 - Size 3-1/8"
	KI-CW 1360 - Size 3-3/4"
	KI-CW 1370 - Size 3-7/8"
	KI-CW 1410 - Size 4-1/8"
	KI-CW 1420 - Size 4-1/4"
	KI-CW 1450 - Size 4-5/8"



OPEN END SLUGGING WRENCH

KI TOOLS®



KI TOOLS OPEN END SLUGGING WRENCH METRIC - MM

FEATURES :

- *Made from CRV chromium vanadium alloy steel with machined drive face to ensure good contact with fastener.*
- *Flat striking face for more efficient force transfer to fastener.*
- *Manufactured to DIN 133 Standard.*

AVAILABLE MODELS

- *KI-SWE 022 – 22 mm*
- *KI-SWE 024 – 24 mm*
- *KI-SWE 027 – 27 mm*
- *KI-SWE 030 – 30 mm*
- *KI-SWE 032 – 32 mm*
- *KI-SWE 034 – 34 mm*
- *KI-SWE 036 – 36 mm*
- *KI-SWE 041 – 41 mm*
- *KI-SWE 046 – 46 mm*
- *KI-SWE 050 – 50 mm*
- *KI-SWE 055 – 55 mm*
- *KI-SWE 060 – 60 mm*
- *KI-SWE 065 – 65 mm*
- *KI-SWE 070 – 70 mm*
- *KI-SWE 075 – 75 mm*
- *KI-SWE 080 – 80 mm*
- *KI-SWE 085 – 85 mm*
- *KI-SWE 090 – 90 mm*
- *KI-SWE 095 – 95 mm*
- *KI-SWE 100 – 100 mm*
- *KI-SWE 105 – 105 mm*
- *KI-SWE 110 – 110 mm*
- *KI-SWE 115 – 115 mm*
- *KI-SWE 120 – 120 mm*
- *KI-SWE 125 – 125 mm*
- *KI-SWE 130 – 130 mm*
- *KI-SWE 135 – 135 mm*
- *KI-SWE 140 – 140 mm*
- *KI-SWE 145 – 145 mm*
- *KI-SWE 150 – 150 mm*



KI TOOLS SINGLE END RING WRENCH - 12PT

FEATURES :

- *Made of special fine alloy steel, heat treated, heavy duty.*

AVAILABLE MODELS

- *KI-SER 17 – 17mm*
- *KI-SER 19 – 19mm*
- *KI-SER 21 – 21mm*
- *KI-SER 22 – 22mm*
- *KI-SER 24 – 24mm*
- *KI-SER 27 – 27mm*
- *KI-SER 30 – 30mm*
- *KI-SER 32 – 32mm*
- *KI-SER 36 – 36mm*
- *KI-SER 38 – 38mm*
- *KI-SER 41 – 41mm*
- *KI-SER 46 – 46mm*

KI TOOLS RATCHET WRENCH



FEATURES :

- *Made from CRV chromium vanadium alloy steel material*
- *Two-way reversible gear design for quick and easy fastening and loosening works*

AVAILABLE MODELS

- *KI-RW 1417 : Size 14 x 17 mm*
- *KI-RW 1719 : Size 17 x 19 mm*
- *KI-RW 1721 : Size 17 x 21 mm*
- *KI-RW 1921 : Size 19 x 21 mm*
- *KI-RW 1922 : Size 19 x 22 mm*
- *KI-RW 1924 : Size 19 x 24 mm*
- *KI-RW 2126 : Size 21 x 26 mm*
- *KI-RW 2427 : Size 24 x 27 mm*
- *KI-RW 2732 : Size 27 x 32 mm*
- *KI-RW 3032 : Size 30 x 32 mm*
- *KI-RW 3236 : Size 32 x 36 mm*
- *KI-RW 3641 : Size 36 x 41 mm*
- *KI-RW 4146 : Size 41 x 46 mm*

PACKING INFORMATION :

- *KI-RW 1417 - 2 Pcs / Box, 20 Box/ Carton*
- *KI-RW 1719 - 2 Pcs / Box, 20 Box/ Carton*
- *KI-RW 1721 - 2 Pcs / Box, 20 Box/ Carton*
- *KI-RW 1921 - 2 Pcs / Box, 20 Box/ Carton*
- *KI-RW 1922 - 2 Pcs / Box, 20 Box/ Carton*
- *KI-RW 1924 - 2 Pcs / Box, 16 Box/ Carton*
- *KI-RW 2126 - 2 Pcs / Box, 12 Box/ Carton*
- *KI-RW 2427 - 2 Pcs / Box, 12 Box/ Carton*
- *KI-RW 2732 - 2 Pcs / Box, 12 Box/ Carton*
- *KI-RW 3032 - 2 Pcs / Box, 12 Box/ Carton*
- *KI-RW 3236 - 2 Pcs / Box, 6 Box/ Carton*
- *KI-RW 3641 - 2 Pcs / Box, 6 Box/ Carton*
- *KI-RW 4146 - 1 Pcs / Box, 6 Box /Carton*

KI TOOLS HEAVY DUTY ALLEN KEY



FEATURES :

- *Precision cut ends provide full engagement*
- *For industrial use and a series made for heavy duty usage.*

AVAILABLE MODELS

- *KI-AK22 : 22 mm*
- *KI-AK24 : 24 mm*
- *KI-AK27 : 27 mm*
- *KI-AK30 : 30 mm*
- *KI-AK32 : 32 mm*
- *KI-AK36 : 36 mm*
- *KI-AK38 : 38 mm*
- *KI-AK41 : 41 mm*

VALVE WRENCH

KI TOOLS®

KI TOOLS DOUBLE VALVE WHEEL WRENCH



16.7mm 21/32" • **KI-DVW200** 12.7mm 1/2"

200mm 8"



25.0mm 1" • **KI-DVW250** 17.5mm 11/16"

250mm 10"



FEATURES :

- *Delivers a quick, smooth "snap" motion that allows for easier opening and closing of stubborn valves.*
- *The wrench is designed to accommodate a wide range of valve wheel sizes and shapes, making it a must-have tool for various valve operations.*
- *Ideal for use in overhead or confined spaces, the specially shaped opening reduces the chance of slippage and ensures a secure hold, even in awkward positions.*
- *Crafted from high-strength steel for long-lasting durability and reliability in demanding environments*

AVAILABLE MODELS:

- *KI-DVW200 Length 200mm - 8"*
- *KI-DVW250 Length 250mm - 10"*

KI TOOLS ALUMINIUM VALVE WHEEL WRENCH





AVAILABLE MODELS:

- *KI-AVW13 Length 350mm 13-5/8"*
  Opening 35mm 1-3/8"
- *KI-AVW17 Length 450mm 17-5/8"*
  Opening 44.5mm 1-3/4"
- *KI-AVW25 Length 650mm 25-1/2"*
  Opening 63.5mm 2-1/2"

FEATURES :

- *The specially shaped head of the wrench fits securely over the valve wheel spokes, allowing for efficient application of force while minimizing the risk of slippage.*
- *The aluminum-magnesium construction offers the ideal balance of strength and lightweight portability, reducing user fatigue during extended use.*
- *Built to withstand harsh environments, the aluminum-magnesium alloy resists corrosion, ensuring long-term durability and reliability even in challenging conditions.*
- *These wrenches are designed to handle a wide range of valve sizes and applications across industries such as chemical processing, oil and gas, water treatment, power generation, and more.*

KI TOOLS®

TORQUE WRENCH

KI TOOLS MECHANICAL TORQUE WRENCH

Built for precision and durability, the KI-TOOLS Series Mechanical Torque Wrench is the definitive tool for professionals. Its robust all-metal construction and high-contrast dual-scale ensure accurate and reliable torque application for any industrial or automotive task.



FEATURES :

- *A high-accuracy mechanism provides reliable ±4% clockwise accuracy for critical applications.*
- *The micrometer adjustment scale on the handle allows for precise and accurate setting of torque values.*
- *An audible click and tactile impulse clearly indicate when the preset torque value has been reached.*
- *The lightweight, knurled aluminum handle offers a secure, non-slip grip while resisting oil and reducing fatigue.*
- *An easy-to-use pull-down locking ring secures torque settings and prevents accidental adjustments.*
- *Each wrench has a unique serial number and conforms to DIN ISO 6789 and ASME B107.14 standards for certified quality.*



A high-contrast, laser-etched dual scale with non-fading, oil and wear-resistant markings ensures permanent legibility.

DR. 1/4" 3/8" 1/2"



DR. 3/4"



DR. 1"



AVAILABLE MODELS

Model Number	Drive Size	Torque Range	Scale	Length	Weight	Qty/Ctn
KI-TQ20025	DR 1/4"	5-25 N.m	0.25 N.m	250mm	0.35 kg	20 pcs
KI-TQ30060	DR 3/8"	10-60 N.m	0.50 N.m	310mm	0.47kg	16 pcs
KI-TQ40200	DR 1/2"	40-200 N.m	1.00 N.m	490mm	1.26kg	12 pcs
KI-TQ40330	DR 1/2"	60-330 N.m	1.50 N.m	565mm	1.34kg	12 pcs
KI-TQ60500	DR 3/4"	100-500 N.m	2.50 N.m	685mm	1.85kg	6 pcs
KI-TQ60800	DR 3/4"	160-800 N.m	4.00 N.m	1200mm	5.60kg	2 pcs
KI-TQ61000	DR 3/4"	200-1000 N.m	5.00 N.m	1200mm	5.60kg	2 pcs
KI-TQ81500	DR 1"	300-1500 N.m	5.00 N.m	1260mm	9.20kg	2 pcs
KI-TQ82000	DR 1"	400-2000 N.m	10.0 N.m	1260mm	9.50kg	2 pcs
KI-TQ83000	DR 1"	600-3000 N.m	15.0 N.m	1260mm	10.0kg	2 pcs

KI TOOLS®

IMPACT SOCKET





KI TOOLS IMPACT SOCKET 6PT 1/2" DRIVE

FEATURES :

- *Made from CRMO*
- *High performance alloy steel*
- *Engineered for use with impact drivers*
- *6-point opening grips flat sides of fasteners, not corners, preventing round-off*
- *Large, high-contrast size marking is permanently laser etched and easy to read, even in low light*
- *1/2" drive heavy-duty impact sockets for use in industrial applications.*

1/2 INCHES DRIVE - STANDARD

AVAILABLE MODELS

- *KI-IS 050008 : 8 mm*
- *KI-IS 050009 : 9 mm*
- *KI-IS 050010 : 10 mm*
- *KI-IS 050011 : 11 mm*
- *KI-IS 050012 : 12 mm*
- *KI-IS 050013 : 13 mm*
- *KI-IS 050014 : 14 mm*
- *KI-IS 050015 : 15 mm*
- *KI-IS 050016 : 16 mm*
- *KI-IS 050017 : 17 mm*
- *KI-IS 050018 : 18 mm*
- *KI-IS 050019 : 19 mm*
- *KI-IS 050020 : 20 mm*
- *KI-IS 050021 : 21 mm*
- *KI-IS 050022 : 22 mm*
- *KI-IS 050023 : 23 mm*
- *KI-IS 050024 : 24 mm*
- *KI-IS 050026 : 26 mm*
- *KI-IS 050027 : 27 mm*
- *KI-IS 050030 : 30 mm*
- *KI-IS 050032 : 32 mm*
- *KI-IS 050034 : 34 mm*
- *KI-IS 050036 : 36 mm*
- *KI-IS 050038 : 38 mm*
- *KI-IS 050041 : 41 mm*
- *KI-IS 050046 : 46 mm*

1/2 INCHES DRIVE - DEEP

AVAILABLE MODELS

- ***KI-ID 050008 : 8 mm***
- ***KI-ID 050009 : 9 mm***
- ***KI-ID 050010 : 10 mm***
- ***KI-ID 050011 : 11 mm***
- ***KI-ID 050012 : 12 mm***
- ***KI-ID 050013 : 13 mm***
- ***KI-ID 050014 : 14 mm***
- ***KI-ID 050015 : 15 mm***
- ***KI-ID 050016 : 16 mm***
- ***KI-ID 050017 : 17 mm***
- ***KI-ID 050018 : 18 mm***
- ***KI-ID 050019 : 19 mm***
- ***KI-ID 050020 : 20 mm***
- ***KI-ID 050021 : 21 mm***
- ***KI-ID 050022 : 22 mm***
- ***KI-ID 050023 : 23 mm***
- ***KI-ID 050024 : 24 mm***
- ***KI-ID 050027 : 27 mm***
- ***KI-ID 050028 : 28 mm***
- ***KI-ID 050029 : 29 mm***
- ***KI-ID 050030 : 30 mm***
- ***KI-ID 050031 : 31 mm***
- ***KI-ID 050032 : 32 mm***
- ***KI-ID 050033 : 33 mm***
- ***KI-ID 050034 : 34 mm***
- ***KI-ID 050035 : 35 mm***
- ***KI-ID 050036 : 36 mm***
- ***KI-ID 050038 : 38 mm***
- ***KI-ID 050041 : 41 mm***

IMPACT SOCKET

KI TOOLS®





KI TOOLS IMPACT SOCKET 6PT 3/4" DRIVE

FEATURES :

- *Made from CRMO*
- *High performance alloy steel*
- *Engineered for use with impact drivers*
- *6-point opening grips flat sides of fasteners, not corners, preventing round-off*
- *Large, high-contrast size marking is permanently laser etched and easy to read, even in low light*
- *3/4" drive heavy-duty impact sockets for use in industrial applications.*

3/4 INCHES DRIVE - STANDARD

AVAILABLE MODELS

- *KI-IS 075017 : 17 mm*
- *KI-IS 075018 : 18 mm*
- *KI-IS 075019 : 19 mm*
- *KI-IS 075020 : 20 mm*
- *KI-IS 075021 : 21 mm*
- *KI-IS 075022 : 22 mm*
- *KI-IS 075023 : 23 mm*
- *KI-IS 075024 : 24 mm*
- *KI-IS 075025 : 25 mm*
- *KI-IS 075026 : 26 mm*
- *KI-IS 075027 : 27 mm*
- *KI-IS 075028 : 28 mm*
- *KI-IS 075029 : 29 mm*
- *KI-IS 075030 : 30 mm*
- *KI-IS 075031 : 31 mm*
- *KI-IS 075032 : 32 mm*
- *KI-IS 075033 : 33 mm*
- *KI-IS 075034 : 34 mm*
- *KI-IS 075035 : 35 mm*
- *KI-IS 075036 : 36 mm*
- *KI-IS 075038 : 38 mm*
- ***KI-IS 075039 : 39 mm***
- *KI-IS 075040 : 40 mm*
- *KI-IS 075041 : 41 mm*
- *KI-IS 075042 : 42mm*
- *KI-IS 075043 : 43 mm*
- *KI-IS 075044 : 44 mm*
- *KI-IS 075045 : 45 mm*
- *KI-IS 075046 : 46 mm*
- *KI-IS 075048 : 48 mm*
- *KI-IS 075050 : 50 mm*
- *KI-IS 075051 : 51 mm*
- *KI-IS 075052 : 52 mm*
- *KI-IS 075054 : 54 mm*
- *KI-IS 075055 : 55 mm*
- *KI-IS 075056 : 56 mm*
- *KI-IS 075057 : 57 mm*
- ***KI-IS 075058 : 58 mm***
- *KI-IS 075060 : 60 mm*
- *KI-IS 075063 : 63 mm*
- *KI-IS 075065 : 65 mm*
- *KI-IS 075070 : 70 mm*
- *KI-IS 075075 : 75 mm*
- *KI-IS 075080 : 80 mm*

3/4 INCHES DRIVE - DEEP

AVAILABLE MODELS

- ***KI-ID 075017 : 17 mm***
- ***KI-ID 075018 : 18 mm***
- ***KI-ID 075019 : 19 mm***
- ***KI-ID 075020 : 20 mm***
- ***KI-ID 075021 : 21 mm***
- ***KI-ID 075022 : 22 mm***
- ***KI-ID 075023 : 23 mm***
- ***KI-ID 075024 : 24 mm***
- ***KI-ID 075025 : 25 mm***
- ***KI-ID 075026 : 26 mm***
- ***KI-ID 075027 : 27 mm***
- ***KI-ID 075028 : 28 mm***
- ***KI-ID 075029 : 29 mm***
- ***KI-ID 075030 : 30 mm***
- ***KI-ID 075031 : 31 mm***
- ***KI-ID 075032 : 32 mm***
- ***KI-ID 075033 : 33 mm***
- ***KI-ID 075034 : 34 mm***
- ***KI-ID 075035 : 35 mm***
- ***KI-ID 075036 : 36 mm***
- ***KI-ID 075037 : 37 mm***
- ***KI-ID 075038 : 38 mm***
- ***KI-ID 075040 : 40 mm***
- ***KI-ID 075041 : 41 mm***
- ***KI-ID 075042 : 42 mm***
- ***KI-ID 075044 : 44 mm***
- ***KI-ID 075045 : 45 mm***
- ***KI-ID 075046 : 46 mm***
- ***KI-ID 075048 : 48 mm***
- ***KI-ID 075050 : 50 mm***
- ***KI-ID 075052 : 52 mm***
- ***KI-ID 075054 : 54 mm***
- ***KI-ID 075055 : 55 mm***
- ***KI-ID 075056 : 56 mm***
- ***KI-ID 075060 : 60 mm***
- ***KI-ID 075065 : 65 mm***
- ***KI-ID 075070 : 70 mm***
- ***KI-ID 075075 : 75 mm***

KI TOOLS®

IMPACT SOCKET





KI TOOLS
IMPACT SOCKET 6PT - 1" DRIVE

FEATURES :

- *Made from CRMO*
- *High performance alloy steel*
- *Engineered for use with impact drivers*
- *6-point opening grips flat sides of fasteners, not corners, preventing round-off*
- *Large, high-contrast size marking is permanently laser etched and easy to read, even in low light*
- *1" drive heavy-duty impact sockets for use in industrial applications.*

1 INCHES DRIVE - STANDARD

AVAILABLE MODELS

- *KI-IS 100017 : 17 mm*
- *KI-IS 100018 : 18 mm*
- *KI-IS 100019 : 19 mm*
- *KI-IS 100021 : 21 mm*
- *KI-IS 100022 : 22 mm*
- *KI-IS 100023 : 23 mm*
- *KI-IS 100024 : 24 mm*
- *KI-IS 100025 : 25 mm*
- *KI-IS 100026 : 26 mm*
- *KI-IS 100027 : 27 mm*
- *KI-IS 100028 : 28 mm*
- *KI-IS 100029 : 29 mm*
- *KI-IS 100030 : 30 mm*
- *KI-IS 100031 : 31 mm*
- *KI-IS 100032 : 32 mm*
- *KI-IS 100033 : 33 mm*
- *KI-IS 100034 : 34 mm*
- *KI-IS 100035 : 35 mm*
- *KI-IS 100036 : 36 mm*
- *KI-IS 100038 : 38 mm*
- *KI-IS 100039 : 39 mm*
- *KI-IS 100040 : 40 mm*
- *KI-IS 100041 : 41 mm*
- *KI-IS 100042 : 42 mm*
- *KI-IS 100043 : 43 mm*
- *KI-IS 100044 : 44 mm*
- *KI-IS 100045 : 45 mm*
- *KI-IS 100046 : 46 mm*
- *KI-IS 100047 : 47 mm*
- *KI-IS 100048 : 48 mm*
- *KI-IS 100050 : 50 mm*
- *KI-IS 100052 : 52 mm*
- *KI-IS 100053 : 53 mm*
- *KI-IS 100055 : 55 mm*
- *KI-IS 100056 : 56 mm*
- *KI-IS 100057 : 57 mm*
- *KI-IS 100058 : 58 mm*
- *KI-IS 100060 : 60 mm*
- *KI-IS 100062 : 62 mm*
- *KI-IS 100063 : 63 mm*
- *KI-IS 100065 : 65 mm*
- *KI-IS 100070 : 70 mm*
- *KI-IS 100075 : 75 mm*
- *KI-IS 100080 : 80 mm*
- *KI-IS 100085 : 85 mm*
- *KI-IS 100090 : 90 mm*
- *KI-IS 100095 : 95 mm*
- *KI-IS 100100 : 100 mm*
- *KI-IS 100105 : 105 mm*
- *KI-IS 100110 : 110 mm*
- *KI-IS 100115 : 115 mm*

1 INCHES DRIVE - DEEP

AVAILABLE MODELS

- *KI-ID 100017 : 17 mm*
- *KI-ID 100018 : 18 mm*
- *KI-ID 100019 : 19 mm*
- *KI-ID 100021 : 21 mm*
- *KI-ID 100022 : 22 mm*
- *KI-ID 100023 : 23 mm*
- *KI-ID 100024 : 24 mm*
- *KI-ID 100025 : 25 mm*
- *KI-ID 100026 : 26 mm*
- *KI-ID 100027 : 27 mm*
- *KI-ID 100028 : 28 mm*
- *KI-ID 100029 : 29 mm*
- *KI-ID 100030 : 30 mm*
- *KI-ID 100031 : 31 mm*
- *KI-ID 100032 : 32 mm*
- *KI-ID 100033 : 33 mm*
- *KI-ID 100034 : 34 mm*
- *KI-ID 100035 : 35 mm*
- *KI-ID 100036 : 36 mm*
- *KI-ID 100037 : 37 mm*
- *KI-ID 100038 : 38 mm*
- *KI-ID 100039 : 39 mm*
- *KI-ID 100040 : 40 mm*
- *KI-ID 100041 : 41 mm*
- *KI-ID 100042 : 42 mm*
- *KI-ID 100046 : 46 mm*
- *KI-ID 100050 : 50 mm*
- *KI-ID 100055 : 55 mm*
- *KI-ID 100060 : 60 mm*
- *KI-ID 100065 : 65 mm*
- *KI-ID 100070 : 70 mm*
- *KI-ID 100075 : 75 mm*
- *KI-ID 100080 : 80 mm*
- *KI-ID 100085 : 85 mm*
- *KI-ID 100090 : 90 mm*
- *KI-ID 100095 : 95 mm*
- *KI-ID 100100 : 100 mm*
- *KI-ID 100105 : 105 mm*
- *KI-ID 100110 : 110 mm*
- *KI-ID 100115 : 115 mm*

IMPACT SOCKET

KI TOOLS®



KI TOOLS IMPACT SOCKET 6PT

FEATURES :

- *Made from CRMO*
- *High performance alloy steel*
- *Engineered for use with impact drivers*
- *6-point opening grips flat sides of fasteners, not corners, preventing round-off*
- *Large, high-contrast size marking is permanently laser etched and easy to read, even in low light*
- *1-1/2 & 2-1/2 in drive heavy-duty impact sockets for use in industrial applications.*

1-1/2 INCHES DRIVE - STANDARD

AVAILABLE MODELS - MM

KI-IS 112041 : 41mm	*Length 80mm*
KI-IS 112046 : 46mm	*Length 85mm*
KI-IS 112050 : 50mm	*Length 85mm*
KI-IS 112055 : 55mm	*Length 90mm*
KI-IS 112060 : 60mm	*Length 90mm*
KI-IS 112065 : 65mm	*Length 95mm*
KI-IS 112070 : 70mm	*Length 95mm*
KI-IS 112075 : 75mm	*Length 100mm*
KI-IS 112080 : 80mm	*Length 100mm*
KI-IS 112085 : 85mm	*Length 110mm*
KI-IS 112090 : 90mm	*Length 110mm*
KI-IS 112095 : 95mm	*Length 110mm*
KI-IS 112100 : 100mm	*Length 115mm*
KI-IS 112105 : 105mm	*Length 115mm*
KI-IS 112110 : 110mm	*Length 115mm*
KI-IS 112115 : 115mm	*Length 125mm*
KI-IS 112120 : 120mm	*Length 125mm*
KI-IS 112125 : 125mm	*Length 130mm*
KI-IS 112130 : 130mm	*Length 135mm*
KI-IS 112135 : 135mm	*Length 140mm*
KI-IS 112140 : 140mm	*Length 140mm*
KI-IS 112145 : 145mm	*Length 145mm*

KI-IS 1121165 : 1-13/16"	*Length 85mm*
KI-IS 1121200 : 2"	*Length 85mm*
KI-IS 1121215 : 2-3/16"	*Length 90mm*
KI-IS 1121230 : 2-3/8"	*Length 90mm*
KI-IS 1121240 : 2-1/2"	*Length 90mm*
KI-IS 1121245 : 2-9/16"	*Length 95mm*
KI-IS 1121260 : 2-3/4"	*Length 95mm*
KI-IS 1121275 : 2-15/16"	*Length 100mm*
KI-IS 1121310 : 3-1/8"	*Length 100mm*
KI-IS 1121340 : 3-1/2"	*Length 110mm*
KI-IS 1121370 : 3-7/8"	*Length 115mm*
KI-IS 1121420 : 4-1/4"	*Length 115mm*
KI-IS 1121450 : 4-5/8"	*Length 125mm*

2-1/2 INCHES DRIVE - STANDARD

AVAILABLE MODELS

- *KI-IS 212060 : 60 mm*
- *KI-IS 212065 : 65 mm*
- *KI-IS 212070 : 70 mm*
- *KI-IS 212075 : 75 mm*
- *KI-IS 212080 : 80 mm*
- *KI-IS 212085 : 85 mm*
- *KI-IS 212090 : 90 mm*
- *KI-IS 212095 : 95 mm*
- *KI-IS 212100 : 100 mm*
- *KI-IS 212105 : 105 mm*
- *KI-IS 212110 : 110 mm*
- *KI-IS 212115 : 115 mm*
- *KI-IS 212120 : 120 mm*
- *KI-IS 212125 : 125 mm*
- *KI-IS 212130 : 130 mm*
- *KI-IS 212135 : 135 mm*
- *KI-IS 212140 : 140 mm*
- *KI-IS 212145 : 145 mm*
- *KI-IS 212150 : 150 mm*

KI TOOLS®

TOOLS & ACCESSORIES

KI TOOLS IMPACT ADAPTER

FEATURES :

- *For your sockets, ratchet handles, extension bars and other accessories.*
- *Ideal tool for mechanics, engineers, carpenters or DIY enthusiasts*
- *Steel ball bearing fitting retainer*
- *Material: Chrome Molybdenum Steel with ball pin hole*

AVAILABLE MODELS :

- ***KI-IA030050** : Size - Female (F) 3/8" – Male (M) 1/2"*
- ***KI-IA050030** : Size - Female (F) 1/2" – Male (M) 3/8"*
- *KI-IA050075 : Size - Female (F) 1/2" – Male (M) 3/4"*
- *KI-IA075050 : Size - Female (F) 3/4" – Male (M) 1/2"*
- *KI-IA075100 : Size - Female (F) 3/4" – Male (M) 1"*
- *KI-IA100075 : Size - Female (F) 1" – Male (M) 3/4"*
- *KI-IA100112 : Size - Female (F) 1"– Male (M) 1-1/2"*
- *KI-IA112100 : Size - Female (F) 1-1/2" – Male (M) 1"*
- ***KI-IA212112** : Size - Female (F) 2-1/2"– Male (M) 1-1/2"*



KI TOOLS IMPACT EXTENSION BAR

FEATURES :

- *Engineered for use with impact drivers*
- *Adds length to access hard-to-reach fasteners*
- *Spring-loaded detent balls securely latch onto sockets, preventing them from being dropped*
- *Through-hole in drive ends locks onto drive tang*

AVAILABLE MODELS :

- *KI-IE050075 - Sizes : Drive 1/2 inches / Length 75mm*
- *KI-IE050125 - Sizes : Drive 1/2 inches / Length 125mm*
- *KI-IE050250 - Sizes : Drive 1/2 inches / Length 250mm*
- *KI-IE075125 - Sizes : Drive 3/4 inches / Length 125mm*
- *KI-IE075200 - Sizes : Drive 3/4 inches / Length 200mm*
- *KI-IE075300 - Sizes : Drive 3/4 inches / Length 300mm*
- ***KI-IE075400**-Sizes : Drive 3/4 inches / Length 400 mm*
- *KI-IE100150 - Sizes : Drive 1 inch / Length 150mm*
- *KI-IE100200 - Sizes : Drive 1 inch / Length 200mm*
- *KI-IE100300 - Sizes : Drive 1 inch / Length 300mm*



KI TOOLS IMPACT UNIVERSAL JOINT

FEATURES :

- *Engineered for use with impact drivers*
- *Adds length to access hard-to-reach fasteners*
- *Spring-loaded detent balls securely latch onto sockets, preventing them from being dropped*
- *Through-hole in drive ends locks onto drive tang*

AVAILABLE MODELS :

- *KI-IUJ1050 - Sizes : Drive 1/2 inches*
- *KI-IUJ1075- Sizes : Drive 3/4 inches*
- *KI-IUJ1100 - Sizes : Drive 1 inches*



SOCKET HANDLE



KI TOOLS L - HANDLE WITH STEEL BALL RETAINER

FEATURES :

- *Action uses a drop forge process to form our Impact Sockets followed by precise heat and surface hardening treatments to deliver unsurpassed material strength, hardeness and superior surface durability.*

AVAILABLE MODELS

- *KI-LH1050 – Size 1/2 inches / 250mm*
- *KI-LH1075 – Size 3/4 inches / 450mm*
- *KI-LH1100 – Size 1 inches / 550mm*



KI TOOLS SLIDING T-HANDLE WITH STEEL BALL RETAINER

FEATURES :

- *Sliding T Handles are used for driving of manually operated sockets. It has a large leverage handle which alloys application of force comfortably. Further final tightening can be done with both hands. The sliding T-Head is provided with a ball to arrest movement of handle at any desired position.*

AVAILABLE MODELS

- *KI-TB1050 – 1/2" Inches / Length 250mm*
- *KI-TB1075 – 3/4" Inches / Length 550mm*
- *KI-TB1100 – 1 Inches / Length 550mm*

KI TOOLS®

RATCHET HANDLE

KI TOOLS RATCHET HANDLE WITH STEEL BALL RETAINER

MODEL : KI-RH1050

FEATURES :

- *Size : 1/2 inches drive*
- *Length : 250mm*






KI TOOLS RATCHET HANDLE WITH STEEL BALL RETAINER

MODEL : KI-RH1075

FEATURES :

- *Size : 3/4 inches drive*
- *Length : 500mm*





KI TOOLS RATCHET HANDLE WITH STEEL BALL RETAINER

MODEL : KI-RH1100

FEATURES :

- *Size : 1 inches drive*
- *Length : 600mm*





IMPACT SOCKET SET

KI TOOLS®



KI TOOLS 1/2" DRIVE IMPACT SOCKET SET C/W ACC. 30 PCS / 8-32MM BLOW MODE CASE

MODEL : KI-ISS1230

FEATURES :

- *High-performance Chrome Molybdenum Steel sockets can be used with impact wrenches*
- *High-torque, 6-point sockets grip flat sides of fasteners, not corners, preventing round-off*

CONTENTS

- *Impact socket (6pt) size : 8,9,10,11,12,13,14,15,16,17,18, 19,20,21, 22, 24, 27, 30, 32mm*
- *Impact socket (12pt) size : 10, 12, 14, 15, 17, 19mm*
- *Impact Spark Plug : 1/2" x 21mm*
- *Impact Extension Bar : 1/2" x 125mm*
- *Impact Sling T-Bar : 1/2" x 250mm*
- *Impact Universal Joint : 1/2"*
- *Ratchet Handle : 1/2"*

PACAKING INFORMATION :

- *4 Sets / Carton*



KI TOOLS 1/2" DRIVE IMPACT SOCKET SET INTERNAL TORX 10 PCS T30-T100

MODEL : KI-T1210

FEATURES :

- *10 piece 1/2 inch drive impact hex socket tool set. Each socket has a drilled end to facilitate retaining*
- *ball bearing for use on ratchets and breaker bars. True impact for exceptional strength and durability. The perfect tool for the profession tradesman, mechanic or DIY enthusiast.*

CONTENTS

- *Full 8 piece set comes complete in a handy storage case. Size : T30, T40, T45, T50, T55, T60, T70, T80, T90, T100*

PACAKING INFORMATION :

- *10 Sets / Carton*

KI TOOLS®

IMPACT SOCKET

KI TOOLS 1/2" DRIVE HEX IMPACT SOCKET SET 10 PCS / 4 -19MM

MODEL : KI-IHS1210



FEATURES :

- *10 piece 1/2 inch drive impact hex socket tool set. Each socket has a drilled end to facilitate retaining ball*
- *bearing for use on ratchets and breaker bars. True impact for exceptional strength and durability. The perfect tool for the profession tradesman, mechanic or DIY enthusiast.*

CONTENTS

- *Full 10 piece set comes complete in a handy storage case.*
- *Size : 4, 5, 6, 8, 10, 12, 14, 16, 17 & 19mm*

FEATURES :

- *10 Sets / Carton*

KI TOOLS HEX IMPACT SOCKET

1/2 " DRIVE

- *KI-IH05004 – 4mm*
- *KI-IH05005 – 5mm*
- *KI-IH05006 – 6mm*
- *KI-IH05007 – 7mm*
- *KI-IH05008 – 8mm*
- *KI-IH05009 – 9mm*
- *KI-IH05010 – 10mm*
- *KI-IH05011 – 11mm*
- *KI-IH05012 – 12mm*
- *KI-IH05013 – 13mm*
- *KI-IH05014 – 14mm*
- *KI-IH05015 – 15mm*
- *KI-IH05016 – 16mm*
- *KI-IH05017 – 17mm*
- *KI-IH05018 – 18mm*
- *KI-IH05019 – 19mm*
- *KI-IH05021 – 21mm*
- *KI-IH05022 – 22mm*

3/4 " DRIVE

- *KI-IH07512 – 12mm*
- *KI-IH07514 – 14mm*
- *KI-IH07517 – 17mm*
- *KI-IH07519 – 19mm*
- *KI-IH07521 – 21mm*
- *KI-IH07522 – 22mm*
- *KI-IH07524 – 24mm*

1 " DRIVE

- *KI-IH10017 – 17mm*
- *KI-IH10019 – 19mm*
- *KI-IH10021 – 21mm*
- *KI-IH10022 – 22mm*
- *KI-IH10024 – 24mm*
- *KI-IH10027 – 27mm*



022415

IMPACT SOCKET SET

KI TOOLS®



KI TOOLS 3/4" DRIVE IMPACT SOCKET SET C/W ACC. 21 PCS / 19-50MM BLOW MODE CASE

MODEL : KI-ISS3421

FEATURES :

- *High-performance Chrome Molybdenum Steel sockets can be used with impact wrenches*
- *High-torque, 6-point sockets grip flat sides of fasteners, not corners, preventing round-off*

CONTENTS

- *Impact socket (6pt) size : 19, 21, 22, 23, 24, 26, 27, 28, 30, 32, 34, 36, 38, 41, 46, 50mm*
- *Impact Extension Bar : 3/4" x 100mm*
- *Impact Extension Bar : 3/4" x 200mm*
- *Impact Sling T-Bar : 3/4"*
- *Ratchet Handle : 3/4"*

FEATURES :

- *1 Set / Carton*



KI TOOLS 1" DRIVE IMPACT SOCKET SET C/W ACC. 15 PCS / 22-46MM METAL CASE

MODEL : KI-ISS10015

FEATURES :

- *High-performance Chrome Molybdenum Steel sockets can be used with impact wrenches*
- *High-torque, 6-point sockets grip flat sides of fasteners, not corners, preventing round-off*

CONTENTS

- *Impact socket (6pt) size : 22, 24, 26, 30, 32, 33, 36, 38, 41, 46mm*
  Impact Extension Bar : 1" x 200mm
- *Impact Extension Bar : 1" x 400mm*
- *Impact Sling T-Bar : 3/4"*
- *Ratchet Handle : 1"*

FEATURES :

- *2 Sets / Carton*

KI TOOLS®

IMPACT SOCKET SET - DEEP

KI TOOLS 1/2" DRIVE DEEP IMPACT SOCKET SET 10 PCS / 10-24MM

MODEL : KI-IDS1210



FEATURES :

- *10 pieces 1/2 inches drive deep impact socket*
- *High-performance Chrome Molybdenum Steel deep sockets can be used with impact wrenches*
- *High-torque, 6-point sockets grip flat sides of fasteners, not corners, preventing round-off*

CONTENTS

- *Deep impact socket (6pt) size : 10,12,13,14,15,17,19,21,22,24 mm*

PACAKING INFORMATION :

- *10 Sets / Carton*

KI TOOLS 1/2" DRIVE DEEP IMPACT SOCKET SET 20 PCS / 8-32MM

MODEL : KI-IDS1220



FEATURES :

- *20 pieces 1/2 inches drive deep impact socket*
- *High-performance Chrome Molybdenum Steel deep sockets can be used with impact wrenches*
- *High-torque, 6-point sockets grip flat sides of fasteners, not corners, preventing round-off*

CONTENTS

- *Deep impact socket (6pt) size : 8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,27, 30,32 mm*

PACAKING INFORMATION :

- *2 Sets / Carton*

TOOLS & ACCESSORIES







KI TOOLS STAINLESS STEEL SAFETY CORD TOOLS HOLDER

MODEL : KI-SCT450

FEATURES :

- *Stainless Steel with Cording*
- *Stainless Steel Insertion*
- *Resting Lenght (L) : 570mm*
- *Max. Extension : 1600 mm*
- *Wire Diameter (B) 6 mm*
- *Max Load Weight : 3 kg*
- *Net Weight : 119g*



KI-RWP100



KI-RWP200

KI TOOLS LEATHER SCAFFOLD FROG TOOL HOLDER

FEATURES :

- *Designed to allow quick & easy access of tools*
- *Made from cow-hide leather & molder for longer lasting durability*

AVAILABLE MODELS :

- KI-RWP 100
- KI-RWP 200



BUCKLE

KI TOOLS HEAVY DUTY NYLON TOOLS BELTS 2.1 INCH

MODEL : KI-NTB100

FEATURES :

- *2.1" heavy duty nylon tools belt – Black*
- *come with quick release buckle, can attach pouches & holsters.*

PACKING INFORMATION :

- *100 Pcs / Carton*











KI TOOLS HEAVY DUTY LEATHER TOOLS BELTS

MODEL : KI-SLB500

FEATURES :

- *Designed to allow quick & easy access of tools*
- *Made from cow-hide leather & molder for longer lasting durability*
- *Leather Belt*
- *Leather Loop*
- *Leather pouches & holsters x 4*

PACKING INFORMATION :

- *25 Pcs / Carton*

COPPER HAMMER




KI TOOLS COPPER HAMMER

FEATURES :

- *Precision-machined solid brass head*
- *Fiberglass handles for extra durability*
- *Non-slip comfort rubber handle design*
- *Used as a general-purpose soft-faced hammer in automotive, general engineering for assembly, repair & maintenance.*

AVAILABLE MODELS :

• KI-CH 100	– Size 1 LBS	- (A)35mm x (B)63mm x (C)300mm
• KI-CH 200	– Size 2 LBS	- (A)45mm x (B)73mm x (C)320mm
• KI-CH 300	– Size 3 LBS	- (A)50mm x (B)88mm x (C)320mm
• KI-CH 400	– Size 4 LBS	- (A)55mm x (B)96mm x (C)350mm
• KI-CH 600	– Size 6 LBS	- (A)65mm x (B)99mm x (C)900mm
• KI-CH 800	– Size 8 LBS	- (A)70mm x (B)110mm x (C)900mm
• KI-CH 1000	– Size 10 LBS	- (A)75mm x (B)125mm x (C)900mm
• KI-CH 1200	– Size 12 LBS	- (A)80mm x (B)132mm x (C)900mm
• KI-CH 1400	– Size 14 LBS	- (A)80mm x (B)154mm x (C)900mm
• KI-CH 1600	– Size 16 LBS	- (A)85mm x (B)155mm x (C)900mm
• KI-CH 1800	– Size 18 LBS	- (A)90mm x (B)157mm x (C)900mm
• KI-CH 2000	– Size 20 LBS	- (A)90mm x (B)173mm x (C)900mm





KI TOOLS NON SPARK SLEDGE HAMMER

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *QB/T2613.6 Precision Casting*
- *The Sledge hammer can apply more force than other hammers, due to its large size*

AVAILABLE MODELS :

- *KI-NSSH 100*
  Sizes : 1 Lbs / 450 g / 310 mm (L) / Al-Br : 610 g
- *KI-NSSH 200*
  Sizes : 2 Lbs / 1000 g / 400 mm (L) / Al-Br : 1300 g
- *KI-NSSH 300*
  Sizes : 3 Lbs / 1400 g / 400 mm (L) / Al-Br : 1700 g
- *KI-NSSH 400*
  Sizes : 4 Lbs / 1800 g / 400 mm (L) / Al-Br : 2100 g
- *KI-NSSH 600*
  Sizes : 6 Lbs / 2700 g / 700 mm (L) / Al-Br : 3410 g
- *KI-NSSH 800*
  Sizes : 8 Lbs / 3600 g / 700 mm (L) / Al-Br : 4310 g
- *KI-NSSH 1000*
  Sizes : 10 Lbs / 4500 g / 900 mm (L) / Al-Br : 5410 g

KI TOOLS NON SPARK INSPECTION HAMMER

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *QB/T2613.8-2005 Die forged*

AVAILABLE MODELS :

- *KI-NSIH 150 : 150 g (H) / 300 mm (L) / Al-Br 206 g*
- *KI-NSIH 250 : 250 g (H) / 335 mm (L) / Al-Br 345 g*



KI TOOLS NON SPARK DRUM OPENER WRENCH

MODEL : KI-NSDP300

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex zones*
- *QB/T2613.8-2005 Die forged*
  It is suitable for different sizes of fasteners by adjusting the opening sizes
- *Size : 300 mm (L) x 38 mm (S1) x 52 mm (S2)*
- *Al-Br : 750g*





KI TOOLS NON SPARK NEEDLE

MODEL : KI-NSN3180

FEATURES :

- *Size : Ø3mm x 180mm*
- *20 Pcs /Pack*






NON SPARK SLUGGING WRENCH

KI TOOLS®



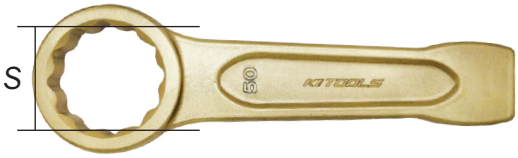





KI TOOLS NON SPARK SLUGGING WRENCH

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *Flat Striking face for more efficient force transfer to fastener*
- *Manufactured to DIN 7444 Standard*

AVAILABLE MODELS :

• KI-NSSW 024 :	*Size 24 mm (S)*	*x 165 mm (L)*	*Al-Br : 210 g*
• KI-NSSW 027 :	*Size 27 mm (S)*	*x 175 mm (L)*	*Al-Br : 315 g*
• KI-NSSW 030 :	*Size 30 mm (S)*	*x 185 mm (L)*	*Al-Br : 430 g*
• KI-NSSW 032 :	*Size 32 mm (S)*	*x 185 mm (L)*	*Al-Br : 420 g*
• KI-NSSW 036 :	*Size 36 mm (S)*	*x 205 mm (L)*	*Al-Br : 520 g*
• KI-NSSW 038 :	*Size 38 mm (S)*	*x 215 mm (L)*	*Al-Br : 620 g*
• KI-NSSW 041 :	*Size 41 mm (S)*	*x 225 mm (L)*	*Al-Br : 680 g*
• KI-NSSW 046 :	*Size 46 mm (S)*	*x 235 mm (L)*	*Al-Br : 890 g*
• KI-NSSW 050 :	*Size 50 mm (S)*	*x 250 mm (L)*	*Al-Br : 1030 g*
• KI-NSSW 055 :	*Size 55 mm (S)*	*x 265 mm (L)*	*Al-Br : 1300 g*
• KI-NSSW 060 :	*Size 60 mm (S)*	*x 274 mm (L)*	*Al-Br : 1450 g*
• KI-NSSW 065 :	*Size 65 mm (S)*	*x 298 mm (L)*	*Al-Br : 1800 g*
• KI-NSSW 070 :	*Size 70 mm (S)*	*x 320 mm (L)*	*Al-Br : 2200 g*
• KI-NSSW 075 :	*Size 75 mm (S)*	*x 326 mm (L)*	*Al-Br : 2720 g*
• KI-NSSW 080 :	*Size 80 mm (S)*	*x 350 mm (L)*	*Al-Br : 3250 g*
• KI-NSSW 085 :	*Size 85 mm (S)*	*x 355 mm (L)*	*Al-Br : 3915 g*
• KI-NSSW 090 :	*Size 90 mm (S)*	*x 380 mm (L)*	*Al-Br : 4700 g*
• KI-NSSW 095 :	*Size 95 mm (S)*	*x 390 mm (L)*	*Al-Br : 4920 g*
• KI-NSSW 100 :	*Size 100 mm (S)*	*x 410 mm (L)*	*Al-Br : 6100 g*
• KI-NSSW 105 :	*Size 105 mm (S)*	*x 420 mm (L)*	*Al-Br : 6320 g*
• KI-NSSW 110 :	*Size 110 mm (S)*	*x 445 mm (L)*	*Al-Br : 8250 g*
• KI-NSSW 120 :	*Size 120 mm (S)*	*x 480mm (L)*	*Al-Br : 9930 g*
• KI-NSSW 130 :	*Size 130 mm (S)*	*x 510 mm (L)*	*Al-Br : 11400 g*
• KI-NSSW 140 :	*Size 140 mm (S)*	*x 520 mm (L)*	*Al-Br : 11750 g*
• KI-NSSW 150 :	*Size 150 mm (S)*	*x 565 mm (L)*	*Al-Br : 13100 g*

KI TOOLS®

NON SPARK COMBINATION WRENCH

KI TOOLS NON SPARK COMBINATION WRENCH


FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *High torque performance over 1.6 times*
- *Manufactured to ANSI & DIN 3113 Standard*

AVAILABLE MODELS :

- KI-NSCW 008 : *Size 8 mm (S) / 120 mm (L) / Al-Br : 34 g*
- KI-NSCW 009 : *Size 9 mm (S) / 135 mm (L) / Al-Br : 50 g*
- KI-NSCW 010 : *Size 10 mm (S) / 135 mm (L) / Al-Br : 50 g*
- KI-NSCW 011 : *Size 11 mm (S) / 150 mm (L) / Al-Br : 75 g*
- KI-NSCW 012 : *Size 12 mm (S) / 150 mm (L) / Al-Br : 70 g*
- KI-NSCW 013 : *Size 13 mm (S) / 175 mm (L) / Al-Br : 110 g*
- KI-NSCW 014 : *Size 14 mm (S) / 175 mm (L) / Al-Br : 110 g*
- KI-NSCW 015 : *Size 15 mm (S) / 195 mm (L) / Al-Br : 145 g*
- KI-NSCW 016 : *Size 16 mm (S) / 195 mm (L) / Al-Br : 140 g*
- KI-NSCW 017 : *Size 17 mm (S) / 195 mm (L) / Al-Br : 140 g*
- KI-NSCW 019 : *Size 19 mm (S) / 215 mm (L) / Al-Br : 190 g*
- KI-NSCW 020 : *Size 20 mm (S) / 230 mm (L) / Al-Br : 200 g*
- KI-NSCW 021 : *Size 21 mm (S) / 230 mm (L) / Al-Br : 200 g*
- KI-NSCW 022 : *Size 22 mm (S) / 245 mm (L) / Al-Br : 220 g*
- KI-NSCW 023 : *Size 23 mm (S) / 265 mm (L) / Al-Br : 233 g*
- KI-NSCW 024 : *Size 24 mm (S) / 265 mm (L) / Al-Br : 230 g*
- KI-NSCW 025 : *Size 25 mm (S) / 265 mm (L) / Al-Br : 230 g*
- KI-NSCW 026 : *Size 26 mm (S) / 290 mm (L) / Al-Br : 380 g*
- KI-NSCW 027 : *Size 27 mm (S) / 290 mm (L) / Al-Br : 380 g*
- KI-NSCW 028 : *Size 28 mm (S) / 290 mm (L) / Al-Br : 400 g*
- KI-NSCW 029 : *Size 29 mm (S) / 320 mm (L) / Al-Br : 580 g*
- KI-NSCW 030 : *Size 30 mm (S) / 320 mm (L) / Al-Br : 500 g*
- KI-NSCW 032 : *Size 32 mm (S) / 340 mm (L) / Al-Br : 600 g*
- KI-NSCW 034 : *Size 34 mm (S) / 360 mm (L) / Al-Br : 750 g*
- KI-NSCW 035 : *Size 35 mm (S) / 360 mm (L) / Al-Br : 800 g*
- KI-NSCW 036 : *Size 36 mm (S) / 360 mm (L) / Al-Br : 800 g*
- KI-NSCW 038 : *Size 38 mm (S) / 430 mm (L) / Al-Br : 1300 g*
- KI-NSCW 041 : *Size 41 mm (S) / 430 mm (L) / Al-Br : 1300 g*
- KI-NSCW 046 : *Size 46 mm (S) / 480 mm (L) / Al-Br : 1700 g*
- KI-NSCW 050 : *Size 50 mm (S) / 520 mm (L) / Al-Br : 2000 g*
- KI-NSCW 055 : *Size 55 mm (S) / 560 mm (L) / Al-Br : 2230 g*
- KI-NSCW 060 : *Size 60 mm (S) / 595 mm (L) / Al-Br : 2950 g*
- KI-NSCW 065 : *Size 65 mm (S) / 595 mm (L) / Al-Br : 2900 g*
- KI-NSCW 070 : *Size 70 mm (S) / 630 mm (L) / Al-Br : 4100 g*
- KI-NSCW 075 : *Size 75 mm (S) / 630 mm (L) / Al-Br : 3620 g*
- KI-NSCW 080 : *Size 80 mm (S) / 660 mm (L) / Al-Br : 4880 g*
- KI-NSCW 085 : *Size 85 mm (S) / 660 mm (L) / Al-Br : 4800 g*
- KI-NSCW 090 : *Size 90 mm (S) / 720 mm (L) / Al-Br : 6410 g*
- KI-NSCW 095 : *Size 95 mm (S) / 720 mm (L) / Al-Br : 6250 g*
- KI-NSCW 100 : *Size 100 mm (S) / 780 mm (L) / Al-Br : 8100 g*
- KI-NSCW 110 : *Size 110 mm (S) / 780 mm (L) / Al-Br : 9369 g*
- KI-NSCW 120 : *Size 120 mm (S) / 900 mm (L) / Al-Br : 11560 g*



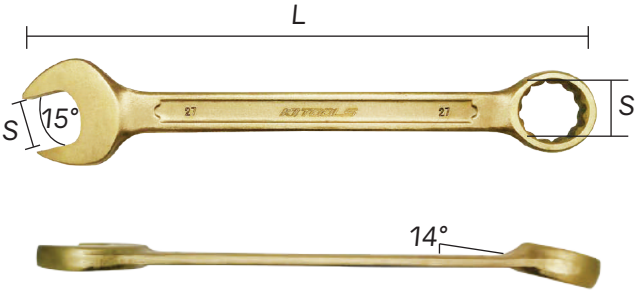

NON SPARK TOOLS

KI TOOLS®



KI TOOLS NON SPARK ADJUSTABLE WRENCH

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *QB/T2613.8-2005 Die forged*
- *It is suitable for different sizes of fasteners by adjusting the opening sizes*

AVAILABLE MODELS :

- KI-NSAW 100
  Size : 4 inches (L) / 100 mm (L) / 13 mm(K) / Al-Br : 30 g
- KI-NSAW 150
  Size : 6 inches (L) / 150 mm (L) / 18 mm(K) / Al-Br : 120 g
- KI-NSAW 200
  Size : 8 inches (L) / 200 mm (L) / 24 mm(K) / Al-Br : 255 g
- KI-NSAW 250
  Size : 10 inches (L) / 250 mm (L) /30 mm(K) / Al-Br : 401 g
- KI-NSAW 300
  Size : 12 inches (L) / 300 mm (L) / 36 mm(K) / Al-Br : 655 g
- KI-NSAW 375
  Size : 15 inches (L) / 375 mm (L) / 46 mm(K) / Al-Br : 1290 g
- KI-NSAW 450
  Size : 18 inches (L) / 450 mm (L) / 55 mm(K) / Al-Br : 2065 g
- KI-NSAW 600
  Size : 24 inches (L) / 600 mm (L) / 65 mm(K) / Al-Br : 4301 g



KI TOOLS NON SPARK PIPE WRENCH - U.S. TYPE

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *QB/T2613.10-2005 Die forged*
- *Use for dia-assembling or assembling pipes & fittings*

AVAILABLE MODELS :


- KI-NSPW 200
  Size : 8 Inches / 200 mm (L) / 25 mm (K) / Al-Br : 418 g
- KI-NSPW 250
  Size : 10 Inches / 250 mm (L) / 30 mm (K) / Al-Br : 738 g
- KI-NSPW 300
  Size : 12 Inches / 300 mm (L) / 40 mm (K) / Al-Br : 1050 g
- KI-NSPW 350
  Size : 14 Inches / 350 mm (L) / 50 mm (K) / Al-Br : 1318 g
- KI-NSPW 450
  Size : 18 Inches / 450 mm (L) / 60 mm (K) / Al-Br : 2260 g
- KI-NSPW 600
  Size : 24 Inches / 600 mm (L) / 75 mm (K) / Al-Br : 3470 g
- KI-NSPW 900
  Size : 36 Inches / 900 mm (L) / 85 mm (K) / Al-Br : 5890 g
- KI-NSPW 1200
  Size : 48 Inches /1200 mm (L) /110 mm (K) /Al-Br : 12620g

NON SPARK TOOLS

KI TOOLS NON SPARK SCRAPER

AVAILABLE MODELS :

- KI-NSR 200
  Size : 2 inches / 50 mm (K) / 95 mm (L) / 200 mm (L1)
  Al-Br : 120 g
- KI-NSR 300
  Size : 3 inches / 75 mm (K) / 95 mm (L) / 200 mm (L1)
  Al-Br : 165 g
- KI-NSR 400
  Size : 4 inches / 100 mm (K) / 95 mm (L) / 200 mm (L1)
  Al-Br : 195 g

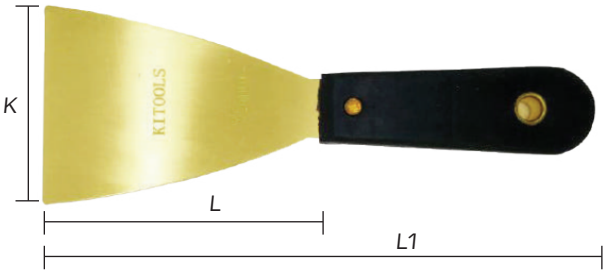



KI TOOLS NON SPARK CHISEL

AVAILABLE MODELS :

- KI-NSC 14160
  Size : 160 mm (L) / 14 mm (S) / Al-Br : 186 g
- KI-NSC 19180
  Size : 180 mm (L) / 19 mm (S) / Al-Br : 402 g
- KI-NSC 22200
  Size : 200 mm (L) / 22 mm (S) / Al-Br : 650 g
- KI-NSC 24250
  Size : 250 mm (L) / 24 mm (S) / Al-Br : 880 g





KI TOOLS NON SPARK COPPER FLANGE WEDGE

MODEL : KI-NSCS 200

AVAILABLE MODELS :

- *Size : 200mm x 40mm x 38mm*



NON SPARK TOOLS

KI TOOLS®



KI TOOLS NON SPARK 1/2" DRIVE SOCKET

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *DIN 3129*

AVAILABLE MODELS :

- *KI-NSS 1210 : 10 mm (S) / 40 mm (L) / Al-Br : 71 g*
- *KI-NSS 1211 : 11 mm (S) / 40 mm (L) / Al-Br : 72 g*
- *KI-NSS 1212 : 12 mm (S) / 40 mm (L) / Al-Br : 72 g*
- *KI-NSS 1213 : 13 mm (S) / 40 mm (L) / Al-Br : 73 g*
- *KI-NSS 1214 : 14 mm (S) / 40 mm (L) / Al-Br : 73 g*
- *KI-NSS 1215 : 15 mm (S) / 40 mm (L) / Al-Br : 85 g*
- *KI-NSS 1216 : 16 mm (S) / 40 mm (L) / Al-Br: 85 g*
- *KI-NSS 1217 : 17 mm (S) / 40 mm (L) / Al-Br : 85 g*
- *KI-NSS 1219 : 19 mm (S) / 42 mm (L) / Al-Br : 100 g*
- *KI-NSS 1220 : 20 mm (S) / 42 mm (L) / Al-Br : 105 g*
- *KI-NSS 1221 : 21 mm (S) / 43 mm (L) / Al-Br : 110 g*
- *KI-NSS 1222 : 22 mm (S) / 43 mm (L) / Al-Br : 115 g*
- *KI-NSS 1224 : 24 mm (S) / 43 mm (L) / Al-Br : 145 g*
- *KI-NSS 1226 : 26 mm (S) / 43 mm (L) / Al-Br : 180 g*
- *KI-NSS 1227 : 27 mm (S) / 46 mm (L) / Al-Br : 190 g*
- *KI-NSS 1230 : 30 mm (S) / 46 mm (L) / Al-Br : 220 g*
- *KI-NSS 1232 : 32 mm (S) / 46 mm (L) / Al-Br : 260 g*



KI TOOLS NON SPARK 1/2" DRIVE RATCHET HANDLE

MODEL : KI-NSRH 1200

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *DIN 3122*
- *Sizes : 1/2" x 245mm (L) x 43mm (H) / Al-Br : 615g*



KI TOOLS NON SPARK 1/2" DRIVE L HANDLE

MODEL : KI-NSLH 1200

FEATURES :

- *Made from special Aluminium-Bronze (Al-Br) alloys for safe use in Ex Zones*
- *DIN 3122*

Sizes : 1/2" x 230mm (L) x 60mm (H) / Al-Br : 380g

NON SPARK TOOLS

KI TOOLS NON SPARK LINEMAN PLIERS 8”

MODEL : KI-NSLP 200

FEATURES :

- *8 Inches (L) / Al-Br 375g*
- *ISO 5746*



KI-NSLP 200

KI TOOLS NON SPARK LONG NOSE PLIERS 8”

MODEL : KI-NSLNP 200

FEATURES :

- *8 Inches (L) / Al-Br 300g*
- *ISO 5745*



KI-NSLNP 200

KI TOOLS NON SPARK DIAGONAL CUTTING PLIERS 6”

MODEL : KI-NSDCP 150

FEATURES :

- *6 Inches (L) / Al-Br 200g*
- *ISO 5746*



KI-NSDCP 150

KI TOOLS NON SPARK GROOVE JOINT PLIERS 10”

MODEL : KI-NSGJP 250

FEATURES :

- *10 Inches (L) / Al-Br 670g*
- *ISO 5745*



KI-NSGJP 250

NON SPARK TOOLS

KI TOOLS®




KI TOOLS NON SPARK CUTTING SHEARS 6”

MODEL : KI-NSCS 150

FEATURES :

- *150 mm (L) / 62mm (B) / Al-Br 100g*
- *STANDARD : QB /T 1966*






KI TOOLS NON SPARK SLOTED SCREWDRIVER

MODEL : KI-NSSD 8150

FEATURES :

- *150 mm (L1) / 260mm (L) / Al-Br 135g*
- *ISO 2380*

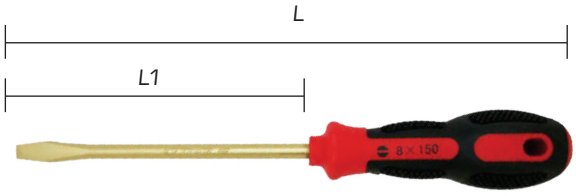




KI TOOLS NON SPARK PHILLIPS SCREWDRIVER

MODEL : KI-NSPD 8150

FEATURES :

- *150 mm (L1) / 265 mm (L) / Al-Br 105g*
- *ISO 2380*

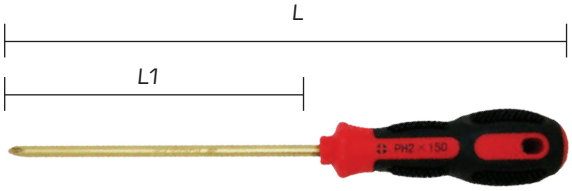

KI TOOLS®


NON SPARK TOOLS

KI TOOLS ALUMINIUM SHOVEL

MODEL : KI-ASS 240

FEATURES :

- *Square-mouth rustproof, easy-to-clean aluminium head*
- *wooden shaft and PYD handle*
- *Dual-riveted head and handle*
- *Size : 990mm (L) x 240mm(B) x 418mm(M)*

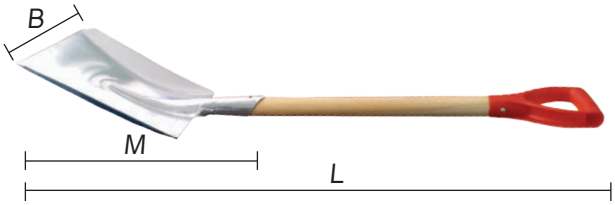



KI TOOLS PLASTIC NON SPARK SHOVEL

MODEL : KI-PNSS 230

FEATURES :

- *Non-spark safety shovels and scoops reduce the risk of sparks during a spill clean-up. These environmental safety shovels are manufactured from polypropylene and are light, safe and easy to use in a spill clean-up. Prior to use wipe the shovels with a damp cloth to reduce surface static.*
- *Sizes : 970mm (L) x 230 mm (B) x 500 mm (H)*

PACKING INFORMATION :

- *10Pcs /Carton*






KI TOOLS NON SPARK SHOVEL

MODEL : KI-NSS 240

FEATURES :

- *These tools can avoid to rise sparking when tools strike, rub or collide with target in explosive atmosphere or flammble vapours and widely used in oil and gas works, petro-chemical plants, explosive manufactories, mines, shipyards, pipeline construction, armed forces, pharmacy, airports and many others.*
- *Sizes : 990mm (L) x 240 mm (B) x 418 mm (H) Al-Br 1650g*

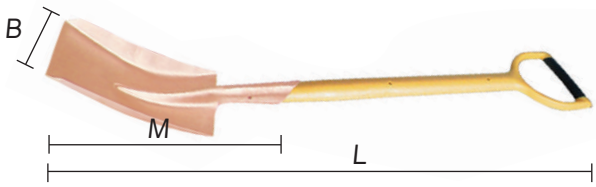



HAND OPERATED HYDRAULIC PUMPS

KI TOOLS®

KI TOOLS HAND OPERATED HYDRAULIC PUMPS

FEATURES :

- *Robust, durable and compact*
- *Two speed hydraulic system for fast and easy operations.*
- *Lower handle effort to minimize operator fatique.*
- *Large and comfortable release knob for improved control of pressure release.*
- *Internal pressure relief valve for overload protection.*
- *Supplied with R2 3/8 male coupler and dust cap.*


KI-HP700



KI-HP700B





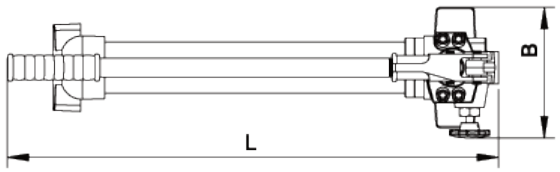

Model	Working Pressure		Oil displacement per stroke		Reservior		Dimension (cm)			Weight
	Low pressure stage	High pressure stage	Low pressure stage	High pressure stage	Oil capacity	Usable oil capacity	L	B	H	
KI-HP700	20bar	700bar	13cm^3	2.3cm^3	1000cm^3	700cm^3	600	120	200	10.6kg
KI-HP700B	20bar	700bar	13cm^3	2.3cm^3	1000cm^3	700cm^3	600	120	240	12.4kg

KI TOOLS®

HAND OPERATED HYDRAULIC PUMPS

KI TOOLS HAND OPERATED HYDRAULIC PUMP
MODEL : KI-HP700A

Working pressure 700 bar. This pump is one-way for single-acting applications.



FEATURES :

- *Robust, durable and compact.*
- *Two-speed hydraulic system for fast and easy operation.*
- *Lower handle effort to minimize operator fatigue.*
- *Large and comfortable release knob for improved control of pressure release.*
- *Internal pressure relief valve for overload protection.*
- *Supplied with R2 3/8 quick copler and dust cap.*

SPECIFICATIONS :

- *Working Pressure - Low pressure stage : 20 bar*
- *- High pressure stage : 700 bar*
- *Oil displacement per stroke - Low pressure stage : 13 cm³*
- *- High pressure stage : 2.3 cm³*
- *Reservior - Oil capacity : 3200 cm³*
- *- Usable oil capacity : 2700 cm³*
- *Weight : 16.8 kg*
- *Packing size : 82 x 18 x 18 cm*


KI TOOLS HAND OPERATED HYDRAULIC PUMPS
MODEL : KI-HHB700S

This hydraulic pump is two-way pump for double-acting hydraulic applications.The working pressure is 700 bar with square and large oil tank.



FEATURES :

- *Robust and durable construction.*
- *Quick grip handle for easy transport.*
- *Two-speed hydraulic system for fast and easy operation.*
- *Reduced handle effort and ergonomic grip for less operator fatigue.*
- *Internal pressure relief valve for overload protection.*
- *Large oil capacities to power a wide range of cylinders or tools.*
- *Supplied with high pressure hose 1.8 meters, gauge and R2 3/8 quick coupler with dust cap.*



SPECIFICATIONS :

Model	Pump Type	Working Pressure		Oil Displacement Per Stroke		Reservior		Dimension (mm)			Weight
		Low pressure stage	High pressure stage	Low pressure stage	High pressure stage	Oil capacity	Usable oil capacity	L	B	H	
KI-HHB700S	Two-Way	20 bar	700 bar	13cm³	2.3cm³	3500cm³	3000cm³	710	150	275	18.6 kg


HYDRAULIC PUMPS


KI TOOLS®

KI TOOLS ELECTRIC POWERED HYDRAULIC PUMP - ONE WAY

MODEL : KI-HHB630C







Standard pumps for most applications. This model is one-way pump for single -acting application.

FEATURES :

- *Lightweight and carrying handle allows for easy transport of the pump.*
- *Two-speed operation reduces cycle time for improved productivity.*
- *All valves are 3 positions for Advance Hold Retract.*
- *This pump is equipped with pressure gauge, which minimizes the risk of overloading and ensure long, dependable service.*
- *Each pump come with 1.5 meter hose and R2 3/8 quick coupler with dust cap.*


SPECIFICATIONS :


Model	Pump Type	Power Rating (kw)	Working Pressure		Flow Rate (L/min)		Usable Oil Capacity (liter)	Dimension (mm)			Weight
			Low pressure stage	High pressure stage	Low pressure stage	High pressure stage		L	B	H	
KI-HHB630C	One-Way	0.75	20 bar	700 bar	5	0.7	8	305	245	510	22 kg

KI TOOLS ELECTRIC POWERED HYDRAULIC PUMPS -TWO WAY

MODEL : KI-HHB630B







This model is two-way pump for double-acting appliantions. Also standard pumps for most applications.

FEATURES :

- *Lightweight and carrying handle allows for easy transport of the pump.*
- *Two-speed operation reduces cycle time for improved productivity.*
- *All valves are 3 position for Advance-Hold-Retract.*
- *All the pumps are equipped with pressure gauge, which minimizes the risk of overloading and ensure long, dependable service.*
- *Manual valve and motor control Internal pressure relief valve prevents overloading.*
- *Each pump comes with 1.5 meter hose and R2 3/8 quick coupler with dust cap.*

SPECIFICATIONS :

Model	Pump Type	Power Rating (kw)	Working Pressure		Flow Rate (L/min)		Usable Oil Capacity (liter)	Dimension (mm)			Weight
			Low pressure stage	High pressure stage	Low pressure stage	High pressure stage		L	B	H	
KI-HHB630B	Two-Way	0.75	20 bar	700 bar	5	0.7	8	305	245	510	26 kg

KI TOOLS®

HYDRAULIC WEDGE SPREADER



KI TOOLS HYDRAULIC MECHANICAL WEDGE SPREADER

MODEL : KI-HHP8

FEATURES :

- *Manual hydraulic operation.*
- *Use stepped blocks to increase wedge opening up to 77 mm.*
- *Safe and reliable hydraulic system.*

SPECIFICATION :

- *Max spreading force 8 Ton*
- *Tip clearance 6mm*
- *Max spread 77mm*
- *Hydraulic type spreader*
- *G.W. 10.4 Kg*
- *Packing size 31 x 16 x 12 cm*

FLANGE SPREADERS

Separation of stubborn joints for inspection and maintenance particularly those fitted with ring grooves or those with external forces acting on them are often difficult to separate. The use of hammers and wedges, chain blocks and lever bars can damage joint components and present a potential safety risk. TLP Wedge Spreaders and Flange Spreader are the ideal solutions.

HYDRAULIC AND MECHANICAL WEDGES SPREADERS


Wedges Spreaders
Friction-free, smooth and parallel wedges movement with unique interlock wedges design. Eliminates flange damage and risk of spreading arm failure.

Stepped spreader arm design – each step can spread under full load
Required very small access gap of only 6 mm
Includes safety block and stepped blocks

HYDRAULIC WEDGE SPREADER

FLANGE SPREADERS


Separation of stubborn joints for inspection and maintenance particularly those fitted with ring grooves or those with external forces acting on them are often difficult to separate. The use of hammers and wedges, chain blocks and lever bars can damage joint components and present a potential safety risk. Wedge Spreaders and Flange Spreader are the ideal solutions.

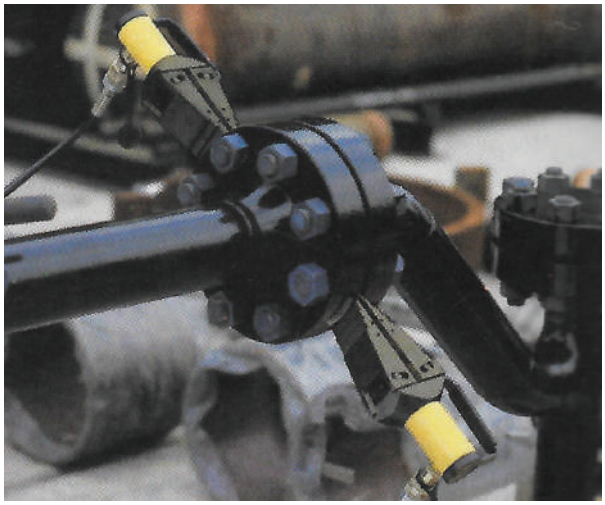

HYDRAULIC AND MECHANICAL WEDGES SPREADERS

Wedges Spreaders
Friction-free, smooth and parallel wedges movement with unique interlock wedges design. Eliminates flange damage and risk of spreading arm failure.

Stepped spreader arm design – each step can spread under full load
Required very small access gap of only 6 mm
Includes safety block and stepped blocks

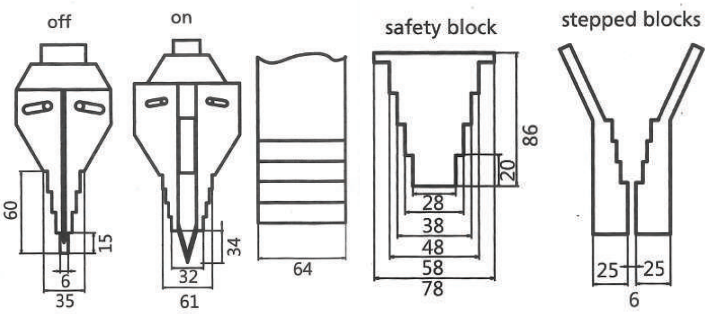

KI TOOLS SELF-CONTAINED HYDRAULIC WEDGE SPREDER

MODEL : KI-FS10

FEATURES :

- *Manual hydraulic operation.*
- *Use stepped blocks to increase wedge opening up to 81 mm.*
- *Safe and reliable hydraulic system.*

SPECIFICATION :


- *Max spreading force 10Ton*
- *Tip clearance 6mm*
- *Max spread 81mm*
- *Hydraulic type spreader*
- *Oil capacity 70cm^3*
- *G.W. 11.5Kg*
- *Packing size 53 x 17 x 11cm*



KI TOOLS®

HYDRAULIC WEDGE SPREADER



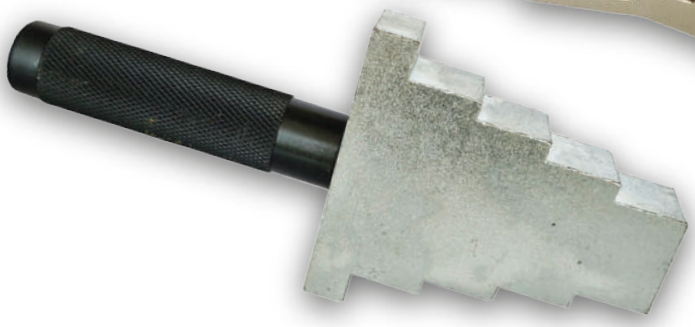



KI TOOLS HYDRAULIC WEDGE SPREDER


MODEL : KI-FS14


FEATURES :

- *Operated by hydraulic pump with rated pressure of 700 bar.*
- *Use stepped blocks to increase wedge opening up to 81 mm.*
- *Supplied with R2 3/8 male coupler and dust cap.*

SPECIFICATIONS :

- *Max spreading force 14Ton*
- *Tip clearance 6mm*
- *Max spread 81mm*
- *Hydraulic type spreader*
- *Oil capacity 70cm^3*
- *G.W. 10.2 Kg*
- *Packing size 31 x 16 x 12cm*

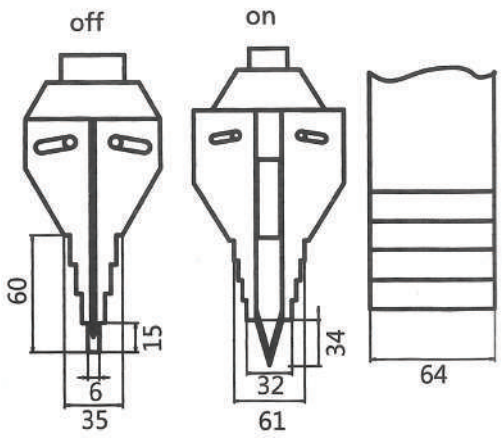

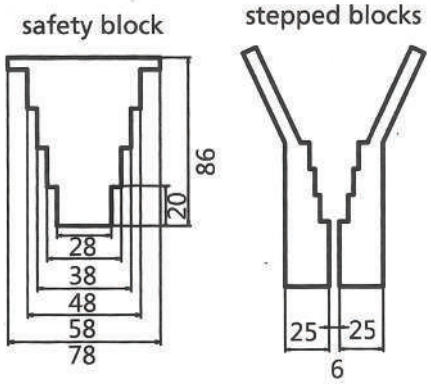

HYDRAULIC NUT SPLITTERS

KI TOOLS®



KI TOOLS HYDRAULIC NUT SPLITTERS

FEATURES :

- *Unique angled head design.*
- *Heavy duty cutting head.*
- *Rugged and durable.*
- *Easy and simple to operate.*
- *Comes with carrying case.*

Suitable for various applications: truck maintenance, pipeline industry, tank cleaning, petrochemical, iron and steel construction, mining, etc.

SPECIFICATIONS :

Model	Out put Force	Bolt Range	Hexagonal Nut Range	G.W.	Packaging Size
KI-NS15	15 Ton	M16-M22	24-32mm	4.1kg	260 x 80 x 80mm
KI-NS20	20 Ton	M22-M27	32-41mm	5.6kg	285 x 90 x 90mm
KI-NS35	35 Ton	M27-M33	41-50mm	10kg	230 x 105 x 105mm
KI-NS50	50 Ton	M33-M39	50-60mm	14kg	360 x 115 x 115mm
KI-NS90	90 Ton	M39-M48	60-75mm	36kg	420 x 175 x 175mm

KI TOOLS®

HYDRAULIC UNIVERSAL TOOL

KI TOOLS 3 IN 1 CRIMPING, CUTTING, PUNCHING

MODEL : KI-HHYD60H

One head for crimping, cutting and punching - one tool for all lightweight and well-balanced. Interchangeable crimping dies, cutting blades and punching adapter. Only seconds of time is needed to switch crimping, cutting and punching functions.

FEATURES :

- *One universal head to complete crimping, cutting and punching jobs.*
- *Two-stage hydraulic system features fast feed and power stroke upon reaching counter pressure, saving time.*
- *10000+ cycle service life.*
- *Ram retracts to original position automatically when operation is complete.*
- *Manual retraction in case of need.*
- *Audible buzzer and red LED light in case of error.*
- *Quick motor stop for higher user safety.*
- *Powerful 18V Li-ion battery with low battery warning.*
- *Ergonomic 2-component grip area and balanced center of gravity.*
- *Sturdy plastic storage box.*

MODEL	KI-HHYD60H
Hydraulic Ram Output	6.5 Ton
Ram Stroke	42 mm
Battery Capacity	90 Cutting Cycles 320 Crimping Cycles 100 Punching Cycles
Cutting Range	ø40mm (Cu/Al and armoured cable)
Crimping Range	16-300mm²
Punching Range	ø22 - ø60mm
Battery	18V/4.0Ah Li-ion
Charging Time	2 hours
ACCESSORIES	
Crimping Dies	16, 25, 35, 50, 70, 95, 120, 150,185, 240,300 mm²
Punching Dies	22, 27, 34, 43, 49, 60 mm
Quantity of Battery	2 pcs
Charger	1 pc
Blade	1 set
Adapter For Crimping	1 pc
Adapter For Punching	1 pc
Draw Stud M20 X 1.5	1 pc
Draw Stud M10 X 1	1 pc
Spacer	1 pc
Seals	1 set
Weight (Kg)	21.4
Packng Size (mm)	585 x 500 x 170





Strong force, low dissipation, long standby time

Press the button to put on & take off the battery



Accessories







Crimp copper lug 16 - 300mm² or aluminum lug 10 - 240mm²



Cut Cu/Al wire or armoured cable up to ø40mm



Punch holes ø22 - ø60mm

HYDRAULIC EXPANDING TOOLS

KI TOOLS®



KI TOOLS MANUAL HYDRAULIC EXPANDING TOOLS

MODEL : KI-HET38

For expanding soft copper tubings ø10-38mm. For efficient, fitting free installation of pipes in sanitary heating, gas, refrigeration and air-conditioning system.

FEATURES :

- *Easy setup, one hand operation and thumb release, minimizing on-the-job fatigue and increasing productivity.*
- *With its small pistol-shape design, the tool can fit in the smallest of spaces.*
- *With hydraulic pressure, this lightweight tool by a few strokes allows a perfect expansion of soft copper tubes.*

SPECIFICATIONS :

- *Expanding range : ø10-38mm.*
- *Expanding heads : Inches 3/8", 1/2", 5/8", 3/4", 7/8", 1-1/8", 1-3/8", 1-5/8"*
- *Wall thickness of copper tubing : 1.0mm*
- *Weight : 5.4 kg*
- *Packing size: 44 x 36 x 13 cm*







KI TOOLS®

HYDRAULIC CRIMPING TOOLS

KI TOOLS HYDRAULIC CRIMPING HEADS

For use in indoor and outdoor power distribution and transmission projects, splicing fittings, overhead underground conductors.

FEATURES :


- *Yoke-type head design is solid and durable.*
- *Convenient handle makes handling and hoisting easier.*
- *Positive die locking mechanism holds dies firmly in place.*
- *Supplied with R2 3/8 male coupler and duct cap.*
- *Requires an external hydraulic pump with rated oil pressure of 700 bar.*
- *Single action cylinder with spring return.*

KI-HCH1000F




KI-HCH630F







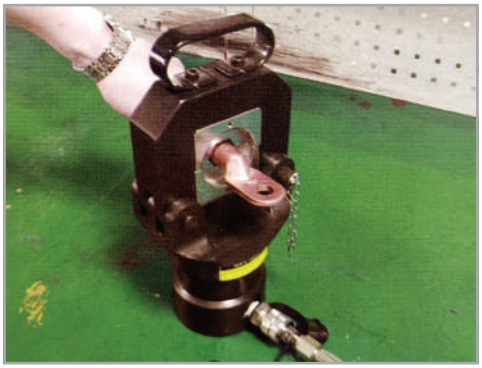


AVAILABLE MODELS:


Model	Output Force (Ton)	Range Stroke (mm)	Crimping Range (mm^2)	Crimping Dies (mm^2)	Crimp Pettern	Weight (Kg)	Packing Size (mm)
KI-HCH630F	23 Ton	22	150 - 630	240, 300, 400, 500, 630	Hexagonal Type	15kg	185 x 170 x300
KI-HCH1000F	35 Ton	30	240 - 1000	400, 500, 630, 800, 1000	Hexagonal Type	23.7kg	200 x 200 x 370

HYDRAULIC CABLE CUTTERS

KI TOOLS®

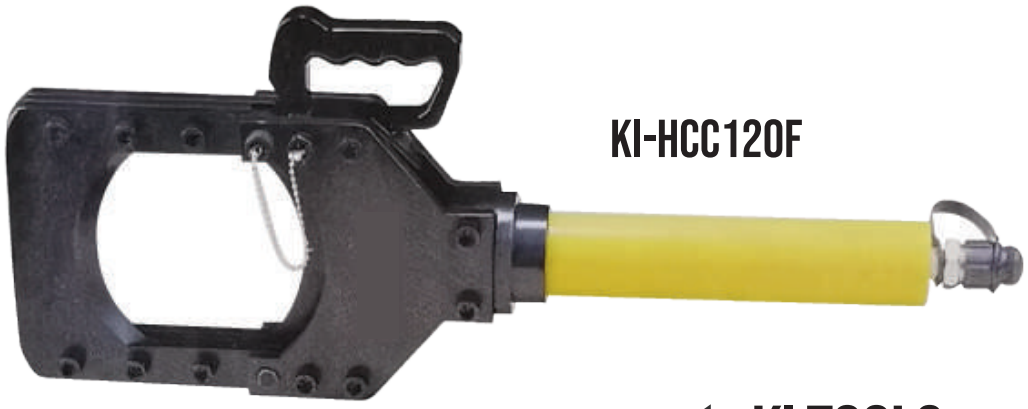

KI-HCC120F

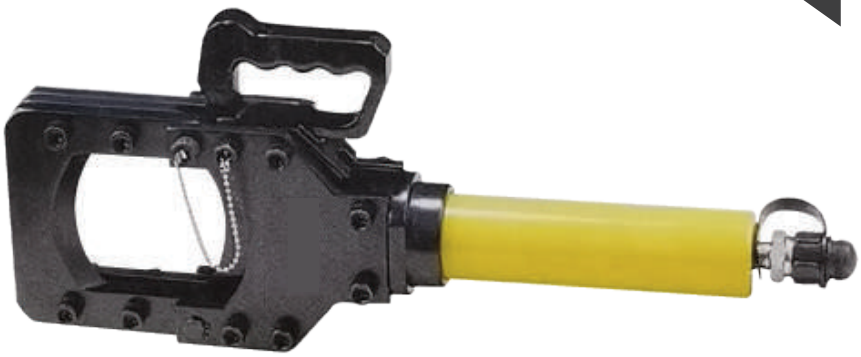

KI-HCC85F

KI TOOLS HYDRAULIC CABLE CUTTER HEADS

WITH BUILT-IN SAFETY VALVE

Cuts armoured Al and Cu cables

FEATURES :

- *Lock pin type cutter head, blades can be replaced easily.*
- *Carry handle for easy shift in job sites.*
- *More safety with remote operation.*
- *Operated by hydraulic pump with rated pressure 700 bar.*





SPECIFICATIONS :

Model	Output Force (ton)	Cutting Range (mm)	Weight (Kg)	Packing Size (mm)
KI-HCC85F	8.5 Ton	ø85mm (Copper, Aluminium/ armored cable)	12.1kg	535 x 260 x 110
KI-HCC120F	13.5 Ton	ø120mm (Copper, Aluminium/ armored cable)	14kg	630 x 270 x 100



Carry Case

KI TOOLS HYDRAULIC KNOCKOUT PUNCHERS RAM & HAND PUMP KITS

MODEL : KI-HHK8B

FEATURES :

- *Fast, easy and simple to operate.*
- *Compact design for field use on construction sites and maintenance jobs.*
- *The kit is consists of hand pump, high pressure hose 0.8 meter, quick couplers and B set of punches and dies.*
- *Sturdy plastic carry case.*

SPECIFICATIONS :

Model	Output Force (ton)	Ram Stroke (mm)	Max. Thickness (mm)		Punch Range (mm)	Punch Dies (mm)	G.W (Kg)	Packing Size (mm)
			Stainless Steel	Mild Steel				
KI-HHK8B	11	22	1.6	3.2	16 - 60	Ø22, Ø27, Ø34, Ø43, Ø49, Ø60	13	450 x 400 x 160



KI TOOLS HYDRAULIC BUSBAR PUNCHER

MODEL : KI-HHM80

FEATURES :

- *Strong durable construction.*
- *Double acting, hydraulic return.*
- *Quick set up punches & dies system.*
- *Flat and clean hole edge.*
- *Punch dies made of high strength steel.*
- *Top eye bolt for easy handling on the job site.*
- *Large flat base for added stability.*
- *Supplied with R2 3/8 male coupler and dust cap.*
- *Operated by double-acting hydraulic pump with rated pressure 700 bar.*

SPECIFICATIONS :

Model	Output Force (ton)	Punch Dies (mm)	Max. Thickness (mm)		Throat Depth (mm)	G.W (Kg)	Packing Size (mm)
			Mild Steel	Copper / Aluminium Busbar			
KI-HHM80	50	16, 18, 22, 25	14	16	125	80	370 x 150 x 440

HYDRAULIC PULLERS

KI TOOLS®



KI TOOLS SELF-CONTAINED HYDRAULIC PULLERS


MODEL : KI-HPL5

This tools are designed for removing a wide variety of gears, bearings, bushings, pulleys and other press-fitted parts.

FEATURES :

- *Use with 2 or 3 jaws.*
- *High quality, forged steel jaws and crosshead provide superior reliability and service.*
- *Precise hydraulic control allows fast, efficient and safe pulling.*
- *High force hydraulic system for effortless pulling of large components.*
- *More efficent pulling, as one man can do the job where manual pullers ofter require two operators.*
- *Spring loaded live centering cone.*
- *Set contained with plastic carry case.*



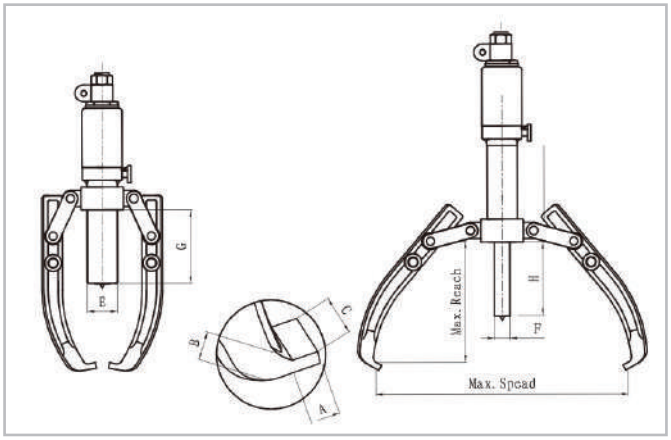


SPECIFICATIONS :

Model	Output (ton)	Spread (mm)	Max Reach (mm)	Ram Stroke (mm)	Dimensions (mm)						Weight (Kg)	Packing Size (mm)
					E	F	G	A	B	C		
KI-HPL5	5 Ton	50-200	140	50	45	23	106	12.5	22.5	26	7.6	42 x 29 x 9
KI-HHL10	10 Ton	50-250	170	60	56	26	97	14	30	30	10.1	43 x 33 x 11
KI-HHL20	20 Ton	100-350	205	70	78	33	105	21	33.5	33	18.6	44 x 35 x 13

KI TOOLS®

HYDRAULIC CYLINDERS

KI TOOLS HYDRAULIC CYLINDERS - SINGLE ACTING GENERAL PURPOSE CYLINDERS

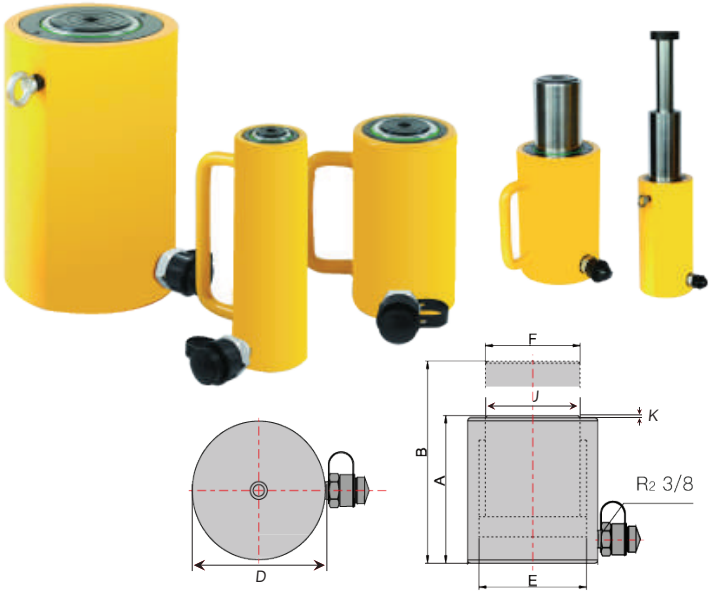

FEATURES :

- *Designed for use in all positions.*
- *High strength alloy steel for durability.*
- *Chrome plated piston resists wear and corrosion.*
- *Dust wiper on piston rod reduces contamination.*
- *Baked enamel finish for increased corrosion resistance.*
- *All cylinders are proof tested to 125% of capacity before leaving our factory.*
- *10-100 ton cylinder bores are roller burnished to harden the surface and make it smoother.*
- *10-200 ton cylinder models are spring return, 250-1000 ton cylinder models are load cylinder models are load return.*
- *Each cylinder has an HH-II R2 3/8 male half coupler and dust cap.*
- *Each cylinder has a flat grooved saddle.*
- *Tilt saddle is available on request.*

SPECIFICATIONS :


Model	Cylinder Capacity @700 bar		Stroke (mm)	Effective Area (cm^2)	Oil Capcity (cm^2)	Closed Height A (mm)	Extended Height B (mm)	Outside Dia. D (mm)	Inside Dia. E (mm)	Piston Rod Dia. F (mm)	G.W (Kg)	Standard Saddle Dia. J (mm)	Sanddle Protr. Form Plgr. K (mm)	Handle
	Ton	KN												
KI-HHYG 1050	10	111	50	15.9	85	122	172	68	45	36	3.1	27.5	2	No
KI-HHYG 10100			100		169	172	272				4.4			Yes
KI-HHYG 10150			150		254	222	372				5.7			Yes
KI-HHYG 2050	20	198	50	28.3	157	126	176	83	60	45	4	37.5	2	No
KI-HHYG 20100			100		311	176	276				5.3			Yes
KI-HHYG 20150			150		465	226	376				6.6			Yes
KI-HHYG 3050	30	309	50	44.2	237	137	187	103	75	65	7.9	48.5	2	No
KI-HHYG 30100			100		471	187	287				10.7			Yes
KI-HHYG 30150			150		705	237	387				13.5			Yes
KI-HHYG 5050	50	496	50	70.8	389	147	197	123	95	70	11.6	57.5	2	No
KI-HHYG 50100			100		768	197	297				14.9			Yes
KI-HHYG 50150			150		1147	247	397				18			Yes
KI-HHYG 10050	100	1077	50	153.9	833	182	232	178	140	100	25.7	83	2	Yes
KI-HHYG 100100			100		1584	232	332				30.6			Eye Bolts
KI-HHYG 100150			150		2335	282	432				35.5			Eye Bolts
KI-HHYG 20050	200	1984	50	283.4	1500	202	252	228	190	135	60	109	4	Eye Bolts
KI-HHYG 200100			100		2953	252	352				71			Eye Bolts
KI-HHYG 200150			150		4406	302	452				83			Eye Bolts
KI-HHYG 30050	300	3165	50	452.2	2262	267	317	285	240	200	126	177	1	Eye Bolts
KI-HHYG 300150			150		6786	367	517				165			Eye Bolts
KI-HHYG 300300			300		13572	517	817				224			Eye Bolts
KI-HHYG 40050	400	4006	50	572.3	2863	315	365	325	270	220	195	198	2	Eye Bolts
KI-HHYG 400150			150		8588	415	565				245			Eye Bolts
KI-HHYG 400300			300		17177	565	865				318			Eye Bolts
KI-HHYG 50050	500	5111	50	730.2	3653	345	395	373	305	250	283	228	2	Eye Bolts
KI-HHYG 500150			150		10959	445	595				349			Eye Bolts
KI-HHYG 500300			300		21918	595	895				451			Eye Bolts
KI-HHYG 60050	600	5984	50	854.9	4276	371	421	402	330	270	354	247	2	Eye Bolts
KI-HHYG 600150			150		12829	471	621				431			Eye Bolts
KI-HHYG 600300			300		25659	621	921				546			Eye Bolts
KI-HHYG 80050	800	8358	50	1194	5973	424	474	472	390	320	560	293	2	Eye Bolts
KI-HHYG 800150			150		17919	524	674				665			Eye Bolts
KI-HHYG 800300			300		35838	674	974				825			Eye Bolts
KI-HHYG 100050	1000	10161	50	1415.5	7261	477	527	530	430	360	799	326	2	Eye Bolts
KI-HHYG 1000150			150		21783	577	727				937			Eye Bolts
KI-HHYG 1000300			300		43566	727	1027				1145			Eye Bolts


Recommended Pump Model : KI-HP700 | KI-HP700A | KI-EHP630C

HYDRAULIC CYLINDERS

KI TOOLS®





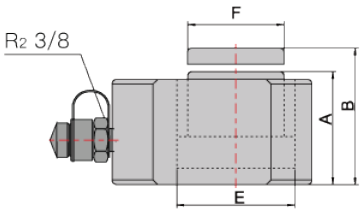

KI TOOLS HYDRAULIC CYLINDERS - SINGLE ACTING LOW HEIGHT CYLINDERS

FEATURES :

- *Compact, flat design for use in confined spaces.*
- *Single acting, spring return.*
- *High strength alloy steel for durability.*
- *Chrome plated piston resists wear and corrosion.*
- *Baked enamel finish for increased corrosion resistance.*
- *Grooved piston rods require no saddle.*
- *Mounting holes permit easy fixturing.*
- *Cylinder bores are roller burnished to harden the surface and make it smoother.*
- *Each cylinder has an HH-II R2 3/8 male half coupler and dust cap.*

SPECIFICATIONS :

Model	Cylinder Capacity @700 bar		Stroke (mm)	Effective Area (cm^2)	Oil Capcity (cm^2)	Closed Height A (mm)	Extended Height B (mm)	Outside Dia. DXL (mm)	Inside Dia. E (mm)	Piston Rod Dia. F (mm)	G.W (Kg)
	Ton	KN									
KI-HHYG 10B	10	111	10	15.9	16	48	58	83 x 60	45	38	1.6
KI-HHYG 20B	20	198	11	28.3	34	56	67	99 x 76	60	50	2.7
KI-HHYG 30B	30	309	13	44.2	55	62	75	123 x 98	75	64	4.6
KI-HHYG 50B	50	496	16	70.8	101	72	88	148 x 120	95	70	7.8
KI-HHYG 100B	100	1002	16	143.1	200	91	107	188 x 160	135	100	16.8
KI-HHYG 150B	150	1496	16	213.7	342	100	116	215 x 190	165	115	27
KI-HHYG 200B	200	1984	20	283.4	567	110	130	255 x 244	190	135	42

Recommended Pump Model : **KI-HP700**